


KUBIK

140-a070010110000

KUBIK WALL / CEILING LUMINAIRE made of metal, satined white, light output direct, dimmability: not dimmable, IP40




DRAWING

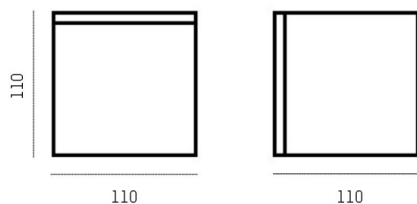

TECHNICAL DETAILS

Bulb type	AGL D45 ECO 46W
No. of bulb holders	1x
Socket	E14
Dimming	not dimmable
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	metal
Length [mm]	110
Width [mm]	110
Height [mm]	110
IP protection class	IP40
Voltage class	protection cl. I
Net weight [kg]	0,70
Colour of glass/shade	satined white
EAN-Number	8033229160387
Lifetime [h]	50 000

LIGHT DISTRIBUTION CURVE

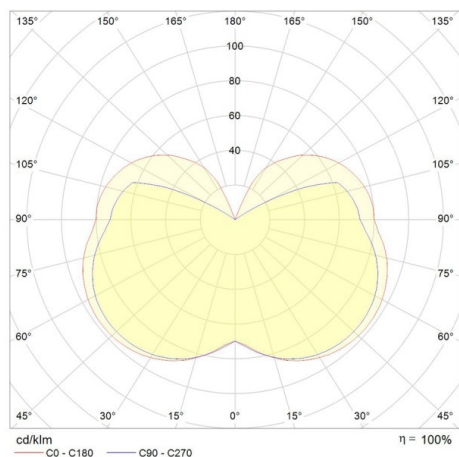

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.