


## TUNE

157-011105011944a

TUNE S PC BWS HIGH-BAY REFLECTOR LUMINAIRE made of aluminium, silver, similar to RAL 9006, high quality plastic lens beam 75°, accessoire: ball grid, light output direct, UGR <25, with converter, max. 1900mA, dimmability: switchable, 1-10V, IP66




## DRAWING

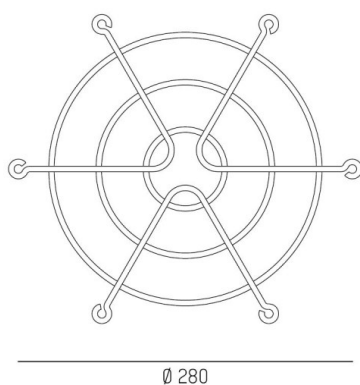

## TECHNICAL DETAILS

System perform. [W]	85
Bulb type	LED
Luminous flux [lm]	12540
Current sec. [mA]	1900
Colour temp. [K]	3000K
CRI	>80
UGR	<25
Optics	high quality plastic lens
Converter	with converter
Dimming	switchable, 1-10V
Light output	direct
Beam angle [°]	75°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	280
Height [mm]	176
Diameter [mm]	280
IP protection class	IP66
Voltage class	protection cl. I
Shock resistance	IK10
Net weight [kg]	3,43
Colour lamp	silver
RAL	9006
EAN-Number	9010870836976
Lifetime [h]	70 000 L80 B10
Ambient temperature	-30° bis +50°
Energy efficiency cl.	D
No. of luminaires B16A	7
IFS suitable	Yes

## LIGHT DISTRIBUTION CURVE

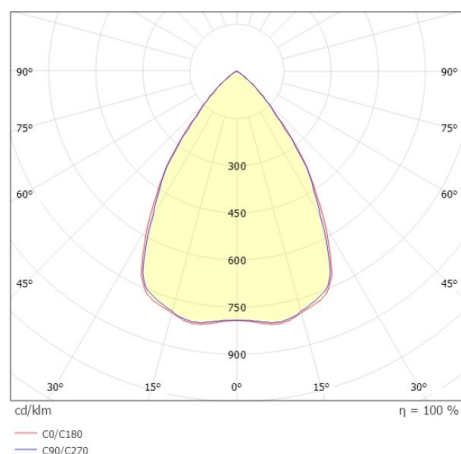

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.