


TUNE

157-012005011944a

TUNE S GLAS HIGH-BAY REFLECTOR LUMINAIRE made of aluminium, silver, similar to RAL 9006, high quality plastic lens beam 75°, accessoire: glass, light output direct, UGR <25, with converter, max. 1900mA, dimmability: switchable, 1-10V, IP66




DRAWING

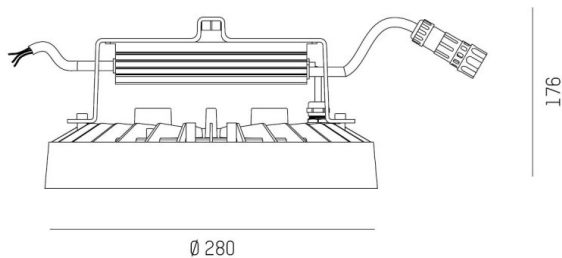

TECHNICAL DETAILS

| | |
|------------------------|---------------------------|
| System perform. [W] | 85 |
| Bulb type | LED |
| Luminous flux [lm] | 12950 |
| Current sec. [mA] | 1900 |
| Colour temp. [K] | 3000K |
| CRI | >80 |
| UGR | <25 |
| Optics | high quality plastic lens |
| Converter | with converter |
| Dimming | switchable, 1-10V |
| Light output | direct |
| Beam angle [°] | 75° |
| Voltage [V] | 220-240V 50/60Hz |
| Material | aluminium |
| Length [mm] | 280 |
| Height [mm] | 176 |
| Diameter [mm] | 280 |
| IP protection class | IP66 |
| Voltage class | protection cl. I |
| Shock resistance | IK08 |
| Net weight [kg] | 3,18 |
| Colour lamp | silver |
| RAL | 9006 |
| EAN-Number | 9010870837270 |
| Lifetime [h] | 70 000 L80 B10 |
| Ambient temperature | -30° bis +50° |
| Energy efficiency cl. | D |
| No. of luminaires B16A | 7 |

LIGHT DISTRIBUTION CURVE

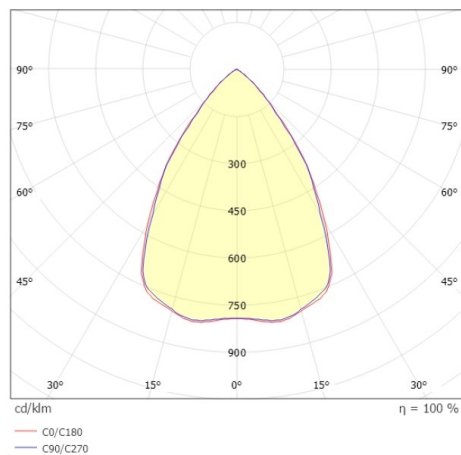

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.