


30NE

175-0165472131441

30NE DIFFUSER LUMINAIRE made of glass fibre reinforced polyester, grey, similar to RAL 7035, PMMA cover light output direct, UGR <28, with converter, dimmability: not dimmable, through wiring 5x2,5mm², IP66 Lumens adjustable by means of DIP-SWITCH converter




DRAWING

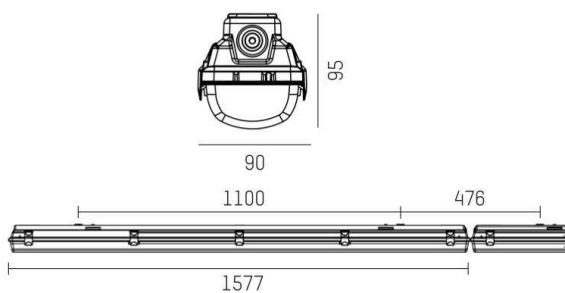

TECHNICAL DETAILS

| | |
|------------------------|----------------------------------|
| System perform. [W] | 44/38/32/25 |
| Bulb type | LED |
| Luminous flux [lm] | 7200/6200/5200/4100 |
| Colour temp. [K] | 4000K |
| CRI | >80 |
| UGR | <28 |
| Optics | PMMA diffuser |
| Converter | with converter |
| Dimming | not dimmable |
| Light output | direct |
| Voltage [V] | 220-240V 50/60Hz |
| Through wiring | 5x2,5mm ² |
| Material | glass fibre reinforced polyester |
| Length [mm] | 1577 |
| Width [mm] | 90 |
| Height [mm] | 95 |
| IP protection class | IP66 |
| Voltage class | protection cl. I |
| Shock resistance | IK03 |
| Net weight [kg] | 2,17 |
| Colour lamp | grey |
| RAL | 7035 |
| EAN-Number | 9010506640939 |
| Lifetime [h] | 100 000 L80 B10 |
| Ambient temperature | -20° bis +35° |
| Energy efficiency cl. | D |
| No. of luminaires B16A | 56 |
| IFS suitable | Yes |

LIGHT DISTRIBUTION CURVE

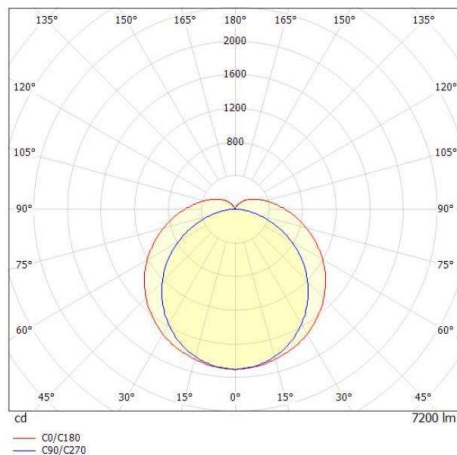

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.