


TIGO

175-0732149231440

TIGO DIFFUSER LUMINAIRE made of polycarbonate, grey, similar to RAL 7035, polycarbonate cover light output direct, UGR <25, with converter, dimmability: not dimmable, through wiring 3x1,5mm², IP66




DRAWING

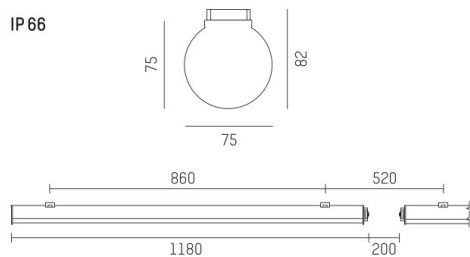

TECHNICAL DETAILS

System perform. [W]	38
Bulb type	LED
Luminous flux [lm]	4900
Colour temp. [K]	4000K
CRI	>80
UGR	<25
Optics	polycarbonate cover
Converter	with converter
Dimming	not dimmable
Light output	direct
Voltage [V]	220-240V 50/60Hz
Through wiring	3x1,5mm²
Material	polycarbonate
Length [mm]	1192
Width [mm]	75
Height [mm]	75
IP protection class	IP66
Voltage class	protection cl. I
Shock resistance	IK08
Net weight [kg]	1,32
Colour lamp	grey
RAL	7035
EAN-Number	9010506636383
Lifetime [h]	50 000 L80 B10
Ambient temperature	-20° bis +35°
Energy efficiency cl.	D
No. of luminaires B16A	34
IFS suitable	Yes

LIGHT DISTRIBUTION CURVE

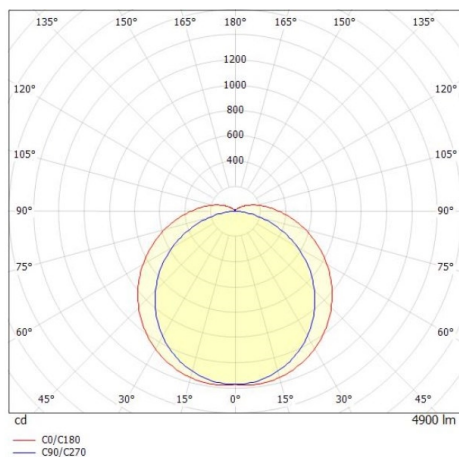

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.