

30NE

175-0942168231401


30NE VISION DIFFUSER LUMINAIRE transparent, polycarbonate cover with multilumen power supply, dimmability: not dimmable, without motion detector, through wiring 3x1,5mm<sup>2</sup>, IP66 Lumens adjustable by means of DIP-SWITCH converter



10316469

MF Pos	Flux (lm)	P (W)
0000	2000	15
0001	2300	17
0010	2700	19
0011	2900	21
0100	3300	22
0101	3500	26
0110	3900	28
0111	4100	30
1000	4500	32
1001	4800	35
1010	5100	37
1011	5400	39
1100	5700	41
1101	6000	44
1110	6400	46
1111	6800	48


DRAWING

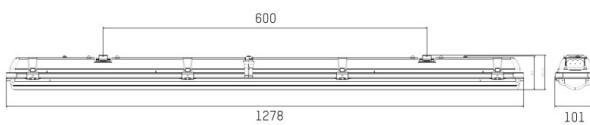

TECHNICAL DETAILS

System perform. [W]	48-15
Bulb type	LED
No. of bulb holders	2x
Luminous flux [lm]	6800-2200
Colour temp. [K]	4000K
CRI	>80
Optics	polycarbonate cover
Converter	with multilumen power supply
Dimming	not dimmable
Motion detector	without motion detector
Voltage [V]	220-240V 50/60Hz
Through wiring	3x1,5mm <sup>2</sup>
Length [mm]	1277
Width [mm]	101
Height [mm]	84
IP protection class	IP66
Voltage class	protection cl. I
Shock resistance	IK08
Net weight [kg]	1,80
Colour lamp	transparent
EAN-Number	9010870312630
Lifetime [h]	50 000
Ambient temperature	-20° bis +35°
Energy efficiency cl.	D

LIGHT DISTRIBUTION CURVE

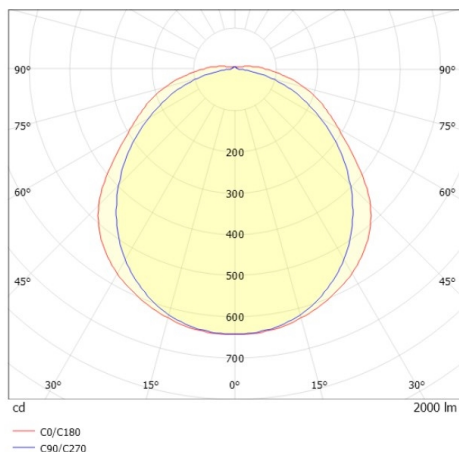

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.