

30NE

175-0945188231401


30NE VISION DIFFUSER LUMINAIRE transparent, polycarbonate cover with multilumen power supply, dimmability: not dimmable, without motion detector, through wiring 3x1,5mm<sup>2</sup>, IP66 Lumens adjustable by means of DIP-SWITCH converter



10316470

MF Pos	Flux (lm)	P (W)
0000	2500	16
0001	3000	19
0010	3500	22
0011	4000	25
0100	4300	28
0101	4800	30
0110	5200	33
0111	5600	36
1000	6000	39
1001	6500	41
1010	6900	44
1011	7400	49
1100	7800	51
1101	8200	54
1110	8600	57
1111	8800	60


DRAWING

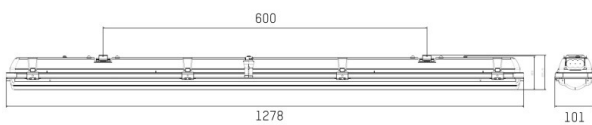

TECHNICAL DETAILS

System perform. [W]	60-16
Bulb type	LED
No. of bulb holders	2x
Luminous flux [lm]	8800-2500
Colour temp. [K]	4000K
CRI	>80
Optics	polycarbonate cover
Converter	with multilumen power supply
Dimming	not dimmable
Motion detector	without motion detector
Voltage [V]	220-240V 50/60Hz
Through wiring	3x1,5mm <sup>2</sup>
Length [mm]	1577
Width [mm]	104
Height [mm]	84
IP protection class	IP66
Voltage class	protection cl. I
Shock resistance	IK08
Net weight [kg]	1,80
Colour lamp	transparent
EAN-Number	9010870312654
Lifetime [h]	50 000
Ambient temperature	-20° bis +35°
Energy efficiency cl.	D

LIGHT DISTRIBUTION CURVE

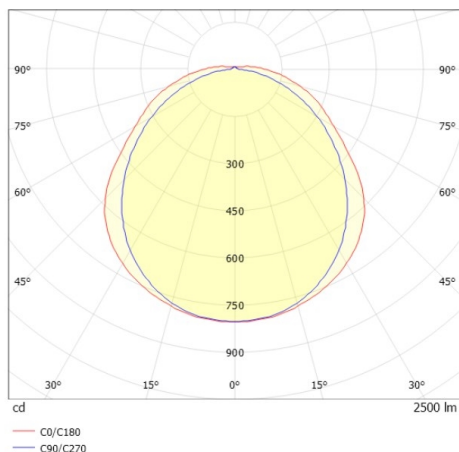

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.