


30NE

175-094536723140d

30NE VISION DIFFUSER LUMINAIRE transparent, polycarbonate cover with converter, dimmability: DALI, without motion detector, through wiring  
5x1,5mm², IP66




DRAWING

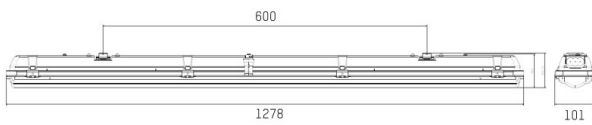

TECHNICAL DETAILS

System perform. [W]	44
Bulb type	LED
No. of bulb holders	2x
Luminous flux [lm]	6700
Colour temp. [K]	4000K
CRI	>80
Optics	polycarbonate cover
Converter	with converter
Motion detector	without motion detector
Voltage [V]	220-240V 50/60Hz
Through wiring	5x1,5mm²
Length [mm]	1577
Width [mm]	104
Height [mm]	84
IP protection class	IP66
Voltage class	protection cl. I
Shock resistance	IK08
Net weight [kg]	1,80
Colour lamp	transparent
EAN-Number	9010870312685
Lifetime [h]	50 000
Ambient temperature	-20° bis +35°
Energy efficiency cl.	D

LIGHT DISTRIBUTION CURVE

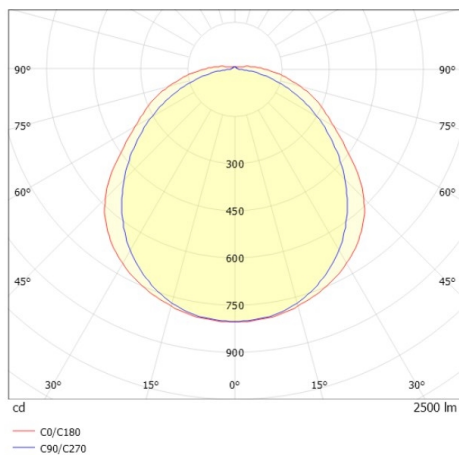

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.