


DIVO SHORT

192-2090200029650


DIVO SHORT VOLARE SUSPENSION WITH 2-PH VOLARE ADAPTER made of aluminium, black, similar to RAL 9005, high quality plastic lens beam 36°, light output direct, with converter, max. 260mA, dimmability: not dimmable, cable black, adapter/ceiling base white, pendant length 3000mm, IP20



DRAWING

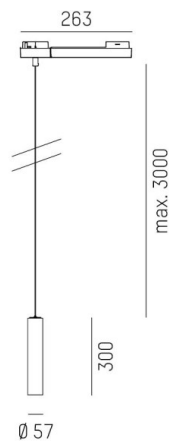

LIGHT DISTRIBUTION CURVE

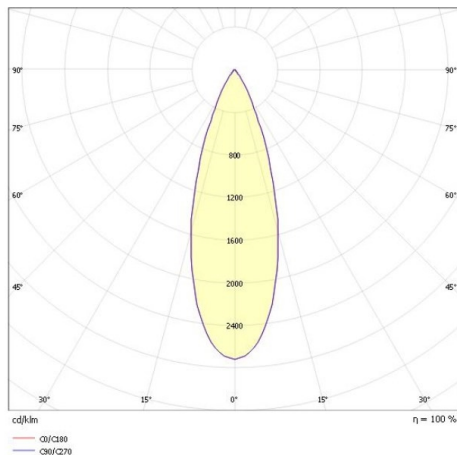

TECHNICAL DETAILS

System perform. [W]	12
Bulb type	LED
Luminous flux [lm]	680
Current sec. [mA]	260
Colour temp. [K]	3000K
CRI	>90
Optics	high quality plastic lens
Converter	with converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	36°
Voltage [V]	220-240V 50/60Hz
Material	aluminium

Length [mm]	300
Pendant length [mm]	3000
Diameter [mm]	57
IP protection class	IP20
Voltage class	protection cl. II
Net weight [kg]	1,14

Colour lamp	black
RAL	9005
Colour adapter/ceiling base	white
Electric wire	black
EAN-Number	9010506773040
Lifetime [h]	L80 B10 20 000
Energy efficiency cl.	G



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.