

WALL 68R

222-00077

WALL 68R GLASS RECESSED WALL / CEILING LUMINAIRE made of aluminium, white, similar to RAL 9003, satined glass beam asymmetric, light output direct, max. 170mA, dimmability: 3 Step Touch Dim, IP20



DRAWING


TECHNICAL DETAILS

| | |
|---------------------|-------------------|
| System perform. [W] | 4 |
| Bulb type | LED |
| Luminous flux [lm] | 80 |
| Current sec. [mA] | 170 |
| Colour temp. [K] | 2700K/3000K/4000K |
| CRI | >90 |
| Optics | satined glass |
| Designer | INHOUSE |
| Light output | direct |
| Beam angle [°] | asymmetrisch |
| Voltage [V] | 220-240V 50Hz |
| Material | aluminium |

| | |
|---------------------|------|
| Height [mm] | 46 |
| Diameter [mm] | 78 |
| Ceiling cutout [mm] | 68 |
| Recess depth [mm] | 46 |
| IP protection class | IP20 |
| Shock resistance | IK09 |
| Net weight [kg] | 0,18 |

| | |
|------------------------|---------------|
| Colour lamp | white |
| RAL | 9003 |
| EAN-Number | 9010870451537 |
| Energy efficiency cl. | F |
| No. of luminaires B16A | 56 |

LIGHT DISTRIBUTION CURVE

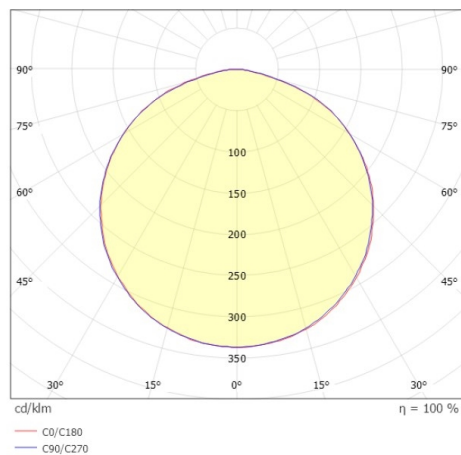

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.