

## AROK W

222-00094

AROK W SURFACE MOUNTED WALL LUMINAIRE black gold, lens beam 30°, light output direct, UGR <22, with converter, max. 160mA, dimmability: on/off, IP20




## DRAWING

## TECHNICAL DETAILS

|                        |                  |
|------------------------|------------------|
| System perform. [W]    | 7                |
| Bulb type              | LED              |
| Luminous flux [lm]     | 255/280          |
| Current sec. [mA]      | 160              |
| Colour temp. [K]       | 2700/3000K       |
| CRI                    | >90              |
| UGR                    | <22              |
| Optics                 | lens             |
| Converter              | with converter   |
| Light output           | direct           |
| Beam angle [°]         | 30°              |
| Voltage [V]            | 220-240V 50/60Hz |
| Length [mm]            | 35               |
| Width [mm]             | 30               |
| Height [mm]            | 180              |
| Diameter [mm]          | 26               |
| IP protection class    | IP20             |
| Voltage class          | protection cl. I |
| Net weight [kg]        | 0,60             |
| Colour lamp            | black gold       |
| EAN-Number             | 9010870517707    |
| Energy efficiency cl.  | F                |
| No. of luminaires B16A | 112              |

## LIGHT DISTRIBUTION CURVE

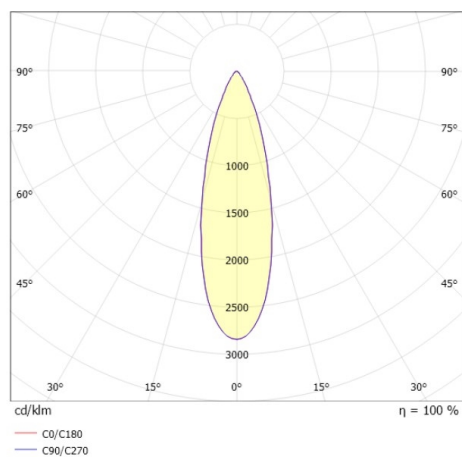

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.