

AROK W

222-00095

AROK W SURFACE MOUNTED WALL LUMINAIRE black coffee, lens beam 30°, light output direct, UGR <22, with converter, max. 160mA, dimmability: on/off, IP20




DRAWING

TECHNICAL DETAILS

| | |
|------------------------|------------------|
| System perform. [W] | 7 |
| Bulb type | LED |
| Luminous flux [lm] | 255/280 |
| Current sec. [mA] | 160 |
| Colour temp. [K] | 2700/3000K |
| CRI | >90 |
| UGR | <22 |
| Optics | lens |
| Converter | with converter |
| Light output | direct |
| Beam angle [°] | 30° |
| Voltage [V] | 220-240V 50/60Hz |
| Length [mm] | 35 |
| Width [mm] | 30 |
| Height [mm] | 180 |
| Diameter [mm] | 26 |
| IP protection class | IP20 |
| Voltage class | protection cl. I |
| Net weight [kg] | 0,60 |
| Colour lamp | black coffee |
| EAN-Number | 9010870433403 |
| Energy efficiency cl. | F |
| No. of luminaires B16A | 112 |

LIGHT DISTRIBUTION CURVE

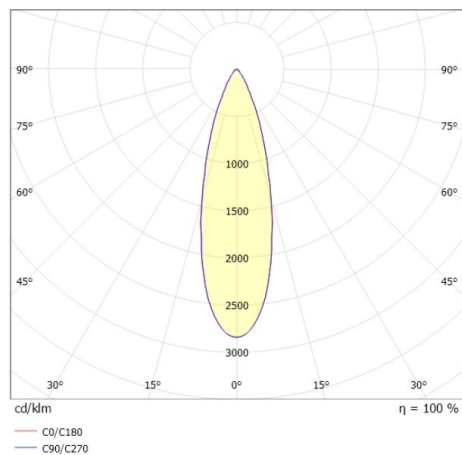

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.