

MAG

222-00148

MAG TRACK TRACK SPOTLIGHT WITH 3 PH ADAPTER made of aluminium, white, similar to RAL 9003, high quality glass lens beam 40°, light output direct, UGR <16, swiveling 350°, tilting 90°, with converter, max. 350mA, dimmability: phase section, IP20




DRAWING

TECHNICAL DETAILS

| | |
|------------------------|-------------------------|
| System perform. [W] | 16 |
| Bulb type | LED |
| Luminous flux [lm] | 1290 |
| Current sec. [mA] | 350 |
| Colour temp. [K] | 2700K |
| CRI | >90 |
| UGR | <16 |
| Optics | high quality glass lens |
| Converter | with converter |
| Dimming | phase section |
| Light output | direct |
| Beam angle [°] | 40° |
| Voltage [V] | 220-240V 50/60Hz |
| Material | aluminium |
| Height [mm] | 118 |
| Diameter [mm] | 120 |
| IP protection class | IP20 |
| Voltage class | protection cl. I |
| Shock resistance | IK02 |
| Net weight [kg] | 0,72 |
| Colour lamp | white |
| RAL | 9003 |
| EAN-Number | 9010870561267 |
| Lifetime [h] | 50 000 L80 B10 |
| Energy efficiency cl. | E |
| No. of luminaires B16A | 56 |

LIGHT DISTRIBUTION CURVE

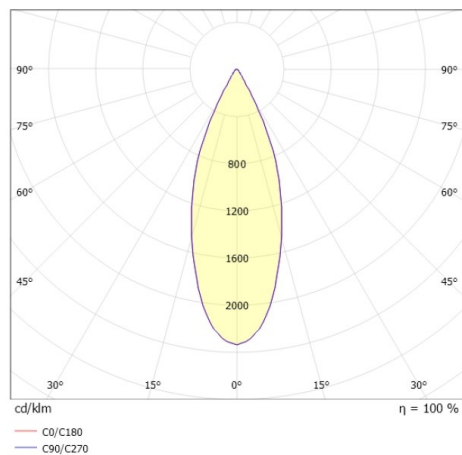

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.