

**MAG**

**222-00150**

MAG TRACK TRACK SPOTLIGHT WITH 3 PH ADAPTER made of aluminium, white, similar to RAL 9003, high quality glass lens beam 40°, light output direct, UGR <16, swiveling 350°, tilting 90°, with converter, max. 350mA, dimmability: phase section, IP20




**DRAWING**

**TECHNICAL DETAILS**

System perform. [W]	16
Bulb type	LED
Luminous flux [lm]	1605
Current sec. [mA]	350
Colour temp. [K]	3000K
CRI	>90
UGR	<16
Optics	high quality glass lens
Converter	with converter
Dimming	phase section
Light output	direct
Beam angle [°]	40°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Height [mm]	118
Diameter [mm]	120
IP protection class	IP20
Voltage class	protection cl. I
Shock resistance	IK02
Net weight [kg]	0,72
Colour lamp	white
RAL	9003
EAN-Number	9010870561335
Lifetime [h]	50 000 L80 B10
Energy efficiency cl.	E
No. of luminaires B16A	56

**LIGHT DISTRIBUTION CURVE**

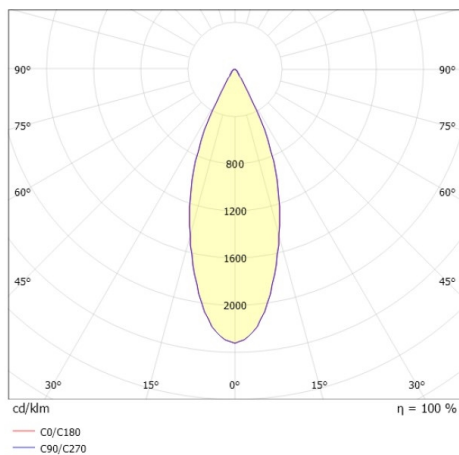

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.