


KODA

333-00056

KODA TEN TWO SURFACE MOUNTED WALL LUMINAIRE made of aluminium, anthrazite, similar to RAL 7016, light output direct / indirect, with converter, dimmability: on/off, IP44

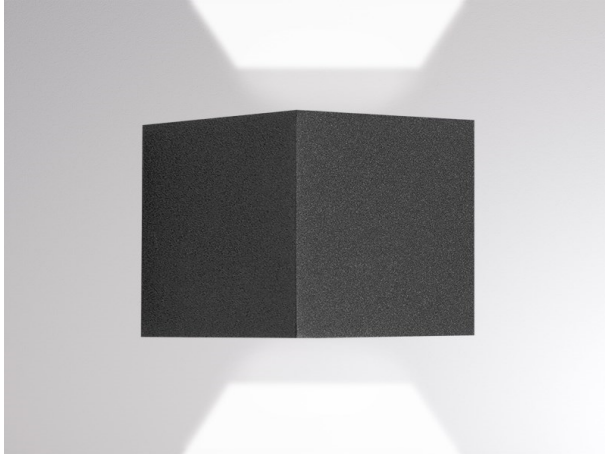


DRAWING

TECHNICAL DETAILS

System perform. [W]	6
Bulb type	LED
Luminous flux [lm]	2x96
Colour temp. [K]	3000K
CRI	>80
Converter	with converter
Light output	direct / indirect
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	100
Width [mm]	100
Height [mm]	100
IP protection class	IP44
Voltage class	protection cl. I
Shock resistance	IK02
Net weight [kg]	0,99
Colour lamp	anthrazite
RAL	7016
EAN-Number	9010870572485
Lifetime [h]	50 000 L80 B10
Ambient temperature	0° bis +35°
Energy efficiency cl.	F
No. of luminaires B16A	27

LIGHT DISTRIBUTION CURVE

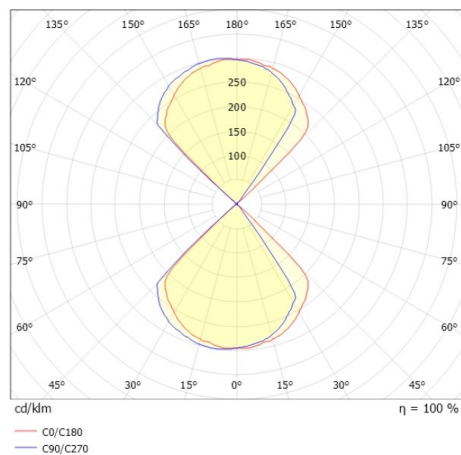

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.