
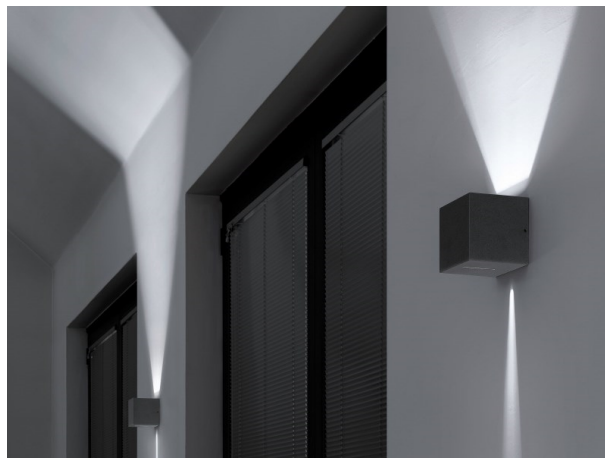


KODA

333-00058

KODA TEN STRETTO SURFACE MOUNTED WALL LUMINAIRE made of aluminium, anthrazite, similar to RAL 7016, light output direct / indirect, with converter, dimmability: on/off, IP44

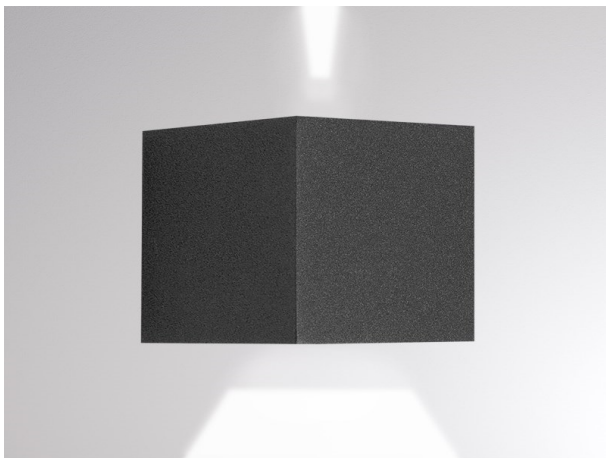


DRAWING

TECHNICAL DETAILS

| | |
|------------------------|-------------------|
| System perform. [W] | 6 |
| Bulb type | LED |
| Luminous flux [lm] | 96+17 |
| Colour temp. [K] | 3000K |
| CRI | >80 |
| Converter | with converter |
| Light output | direct / indirect |
| Voltage [V] | 220-240V 50/60Hz |
| Material | aluminium |
| Length [mm] | 100 |
| Width [mm] | 100 |
| Height [mm] | 100 |
| IP protection class | IP44 |
| Voltage class | protection cl. I |
| Shock resistance | IK02 |
| Net weight [kg] | 1,00 |
| Colour lamp | anthrazite |
| RAL | 7016 |
| EAN-Number | 9010870572508 |
| Lifetime [h] | 50 000 L80 B10 |
| Ambient temperature | 0° bis +35° |
| Energy efficiency cl. | F |
| No. of luminaires B16A | 27 |

LIGHT DISTRIBUTION CURVE

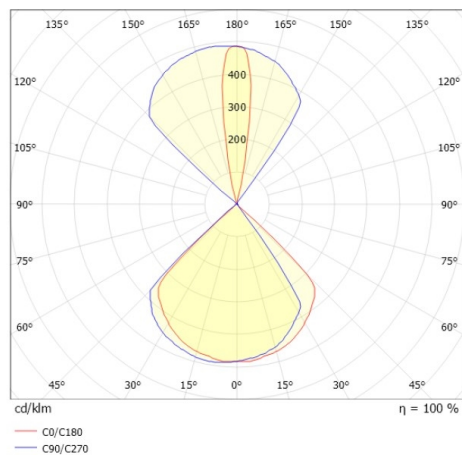

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.