


KODA

333-00067

KODA THIRTY TWO SURFACE MOUNTED WALL LUMINAIRE made of aluminium, white, similar to RAL 9003, light output direct / indirect, with converter, dimmability: on/off, IP65

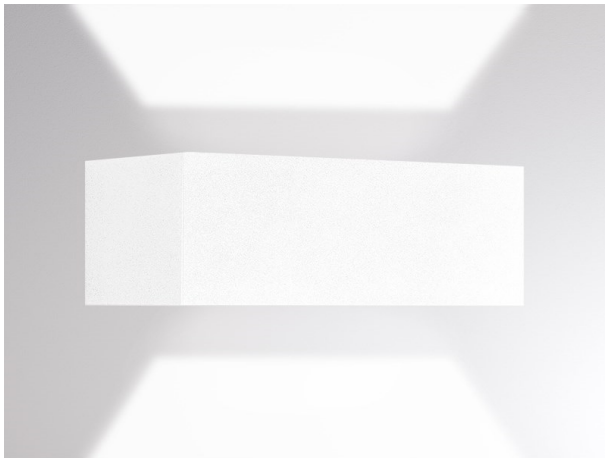

DRAWING


TECHNICAL DETAILS

| | |
|---------------------|-------------------|
| System perform. [W] | 32 |
| Bulb type | LED |
| Luminous flux [lm] | 2x766 |
| Colour temp. [K] | 3000K |
| CRI | >80 |
| Converter | with converter |
| Light output | direct / indirect |
| Voltage [V] | 220-240V 50/60Hz |
| Material | aluminium |

| | |
|---------------------|------------------|
| Length [mm] | 300 |
| Width [mm] | 100 |
| Height [mm] | 102 |
| IP protection class | IP65 |
| Voltage class | protection cl. I |
| Shock resistance | IK06 |
| Net weight [kg] | 2,25 |

| | |
|------------------------|----------------|
| Colour lamp | white |
| RAL | 9003 |
| EAN-Number | 9010870572584 |
| Lifetime [h] | 50 000 L80 B10 |
| Ambient temperature | -20° bis +35° |
| Energy efficiency cl. | F |
| No. of luminaires B16A | 12 |

LIGHT DISTRIBUTION CURVE

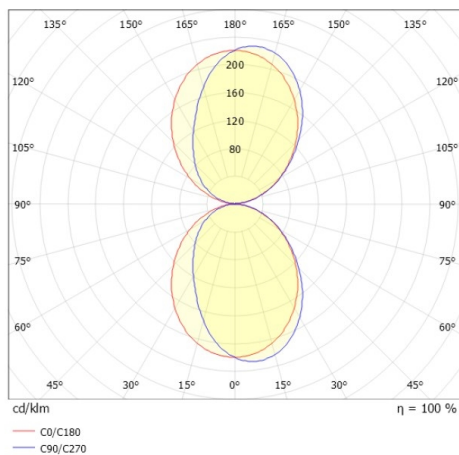

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.