


CADAN NOVA SD

445-7212014180

CADAN NOVA SD WALL / CEILING LUMINAIRE made of aluminium, natural anodised, satined PMMA opal diffuser light output direct, with converter, dimmability: not dimmable, IP20

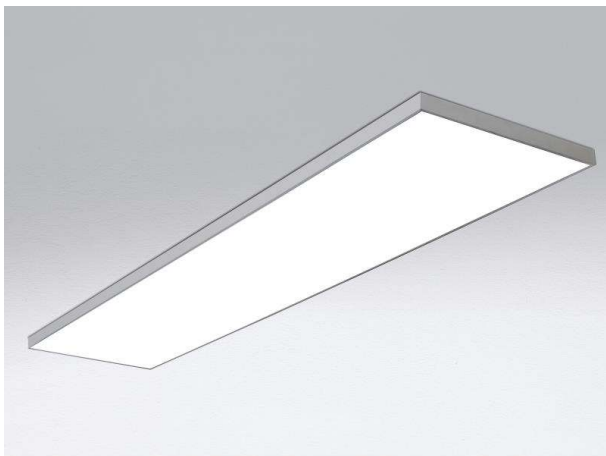


DRAWING



TECHNICAL DETAILS

System perform. [W]	26
Bulb type	LED
Luminous flux [lm]	2790
Colour temp. [K]	4000K
CRI	>80
Optics	PMMA opal diffuser
Converter	with converter
Dimming	not dimmable
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	1200
Width [mm]	200
Height [mm]	50
IP protection class	IP20
Voltage class	protection cl. I
Shock resistance	IK02
Net weight [kg]	6,00
Color lamp	natural anodised
EAN-Number	9008905876738
Lifetime [h]	L85 B10 50 000
No. of luminaires B16A	30

LIGHT DISTRIBUTION CURVE

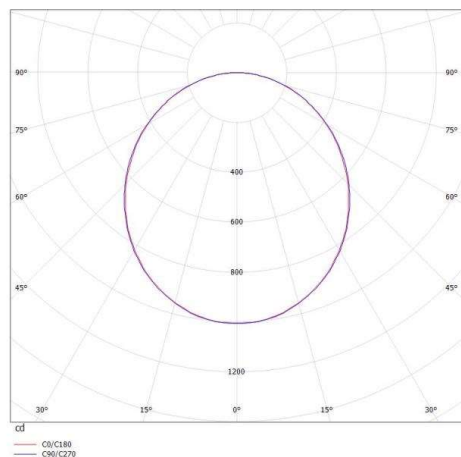

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.