


CADAN NOVA L PDI

445-751501418d

CADAN NOVA L PDI SUSPENSION made of aluminium, natural anodised, sated PMMA opal diffuser light output direct / indirect, with converter, dimmability: DALI, cable transparent, adapter/ceiling base grey, pendant length max. 1500mm, IP20




DRAWING

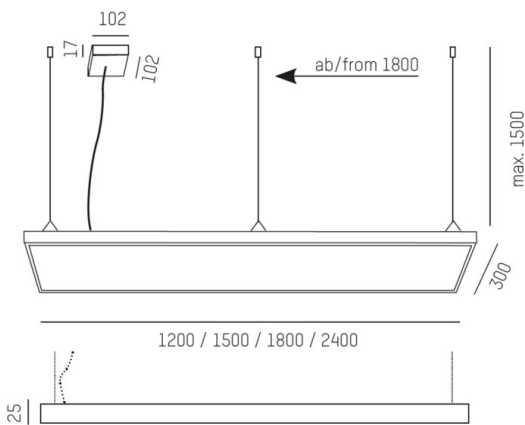

TECHNICAL DETAILS

System perform. [W]	65
Bulb type	LED
Luminous flux [lm]	8120
Colour temp. [K]	4000K
CRI	>80
Optics	PMMA opal diffuser
Converter	with converter
Light output	direct / indirect
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	1500
Width [mm]	300
Height [mm]	25
Pendant length [mm]	max. 1500
IP protection class	IP20
Voltage class	protection cl. I
Shock resistance	IK02
Net weight [kg]	8,80
Colour lamp	natural anodised
Colour adapter/ceiling base	grey
Electric wire	transparent
EAN-Number	9008905879388
Lifetime [h]	L85 B10 50 000
No. of luminaires B16A	12

LIGHT DISTRIBUTION CURVE

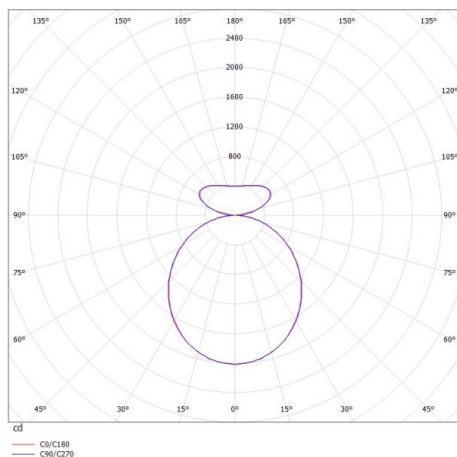

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.