


**CADAN NOVA SYSTEM PDI**

**445-791211426d**

CADAN NOVA SYSTEM PDI SYSTEM LUMINAIRE made of aluminium, black, similar to RAL 9005, microprismatic PMMA cover for perfect anti-glare light output direct / indirect, UGR <19, with converter, dimmability: DALI, adapter/ceiling base black, pendant length max. 1500mm, IP20




**DRAWING**

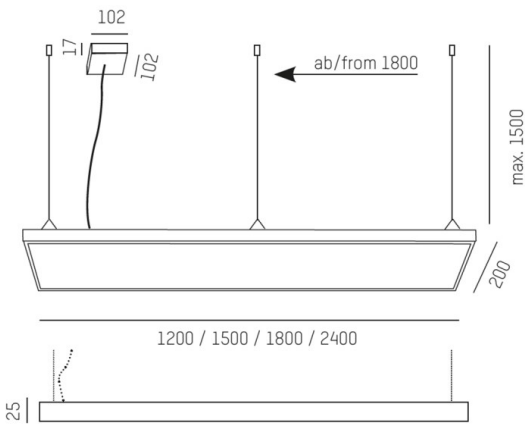

**TECHNICAL DETAILS**

System perform. [W]	43
Bulb type	LED
Luminous flux [lm]	5170
Colour temp. [K]	4000K
CRI	>80
UGR	<19
Optics	microprismatic cover
Converter	with converter
Light output	direct / indirect
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	1200
Width [mm]	200
Height [mm]	25
Pendant length [mm]	max. 1500
IP protection class	IP20
Voltage class	protection cl. I
Shock resistance	IK02
Net weight [kg]	4,80
Colour lamp	black
RAL	9005
Colour adapter/ceiling base	black
EAN-Number	9010506306392
Lifetime [h]	L85 B10 50 000

**LIGHT DISTRIBUTION CURVE**

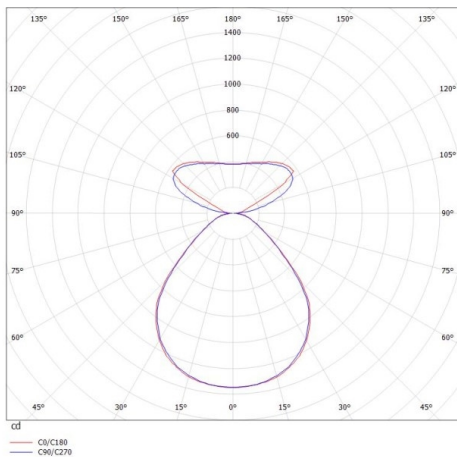

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.