


CADAN NOVA SYSTEM PDI

445-7915119250

CADAN NOVA SYSTEM PDI SYSTEM LUMINAIRE made of aluminium, white, similar to RAL 9003, microprismatic PMMA cover for perfect anti-glare light output direct / indirect, UGR <19, with converter, adapter/ceiling base white, pendant length max. 1500mm, IP20




DRAWING

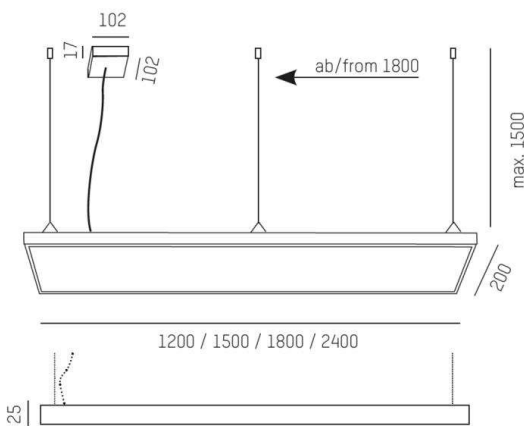

TECHNICAL DETAILS

System perform. [W]	53
Bulb type	LED
Luminous flux [lm]	5984
Colour temp. [K]	3000K
CRI	>80
UGR	<19
Optics	microprismatic cover
Converter	with converter
Light output	direct / indirect
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	1500
Width [mm]	200
Height [mm]	25
Pendant length [mm]	max. 1500
IP protection class	IP20
Voltage class	protection cl. I
Shock resistance	IK02
Net weight [kg]	5,70
Color lamp	white
RAL	9003
Color adapter/ceiling base	white
EAN-Number	9010506306750
Lifetime [h]	L85 B10 50 000

LIGHT DISTRIBUTION CURVE

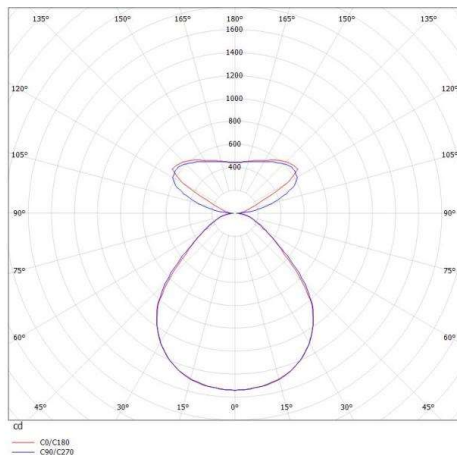

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.