

CADAN NOVA SYSTEM PDI

445-79601915d


CADAN NOVA SYSTEM PDI SYSTEM LUMINAIRE made of aluminium, white, similar to RAL 9003, satined PMMA opal diffuser light output direct / indirect, with converter, dimmability: DALI, adapter/ceiling base white, pendant length max. 1500mm, IP20



DRAWING



LIGHT DISTRIBUTION CURVE

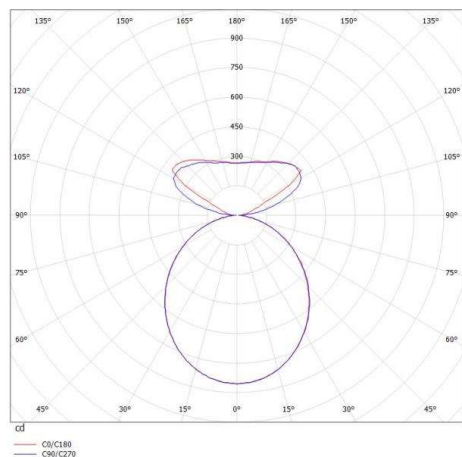

TECHNICAL DETAILS

System perform. [W]	35
Bulb type	LED
Luminous flux [lm]	3749
Colour temp. [K]	3000K
CRI	>80
Optics	PMMA opal diffuser
Converter	with converter
Light output	direct / indirect
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	600
Width [mm]	200
Height [mm]	25
Pendant length [mm]	max. 1500
IP protection class	IP20
Voltage class	protection cl. I
Shock resistance	IK02
Net weight [kg]	4,50
Colour lamp	white
RAL	9003
Colour adapter/ceiling base	white
EAN-Number	9010506306934
Lifetime [h]	L85 B10 50 000



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.