


CADAN NOVA SYSTEM PDI

445-79601928d

CADAN NOVA SYSTEM PDI SYSTEM LUMINAIRE made of aluminium, natural anodised, microprismatic PMMA cover for perfect anti-glare light output direct / indirect, UGR <19, with converter, dimmability: DALI, adapter/ceiling base silver, pendant length max. 1500mm, IP20




DRAWING

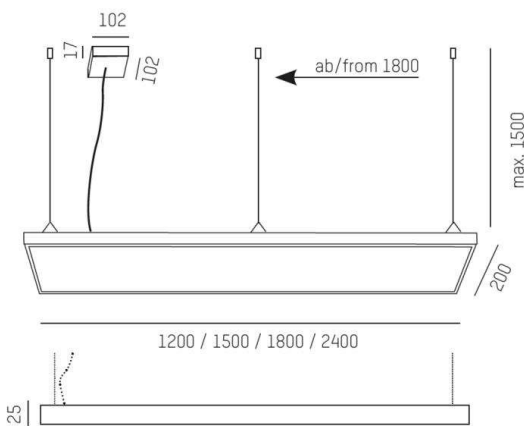

TECHNICAL DETAILS

| | |
|----------------------------|----------------------|
| System perform. [W] | 35 |
| Bulb type | LED |
| Luminous flux [lm] | 3805 |
| Colour temp. [K] | 3000K |
| CRI | >80 |
| UGR | <19 |
| Optics | microprismatic cover |
| Converter | with converter |
| Light output | direct / indirect |
| Voltage [V] | 220-240V 50/60Hz |
| Material | aluminium |
| Length [mm] | 600 |
| Width [mm] | 200 |
| Height [mm] | 25 |
| Pendant length [mm] | max. 1500 |
| IP protection class | IP20 |
| Voltage class | protection cl. I |
| Shock resistance | IK02 |
| Net weight [kg] | 4,50 |
| Color lamp | natural anodised |
| Color adapter/ceiling base | silver |
| EAN-Number | 9010506307023 |
| Lifetime [h] | L85 B10 50 000 |

LIGHT DISTRIBUTION CURVE

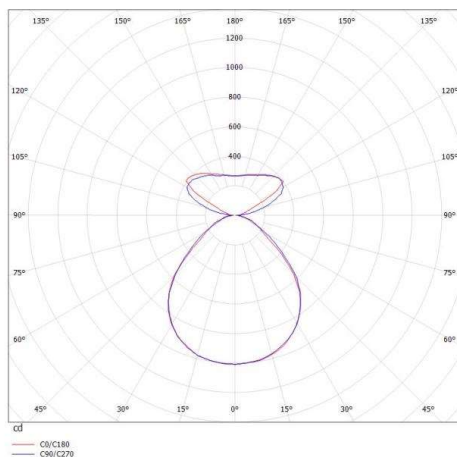

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.