

GET F XS

468-110021455

GET ROUND FLAT XS R RECESSED DOWNLIGHT made of aluminium, white, similar to RAL 9016, microprismatic PMMA cover for perfect anti-glare beam 90°, light output direct, UGR <19, without converter, max. 350/500/700mA, dimmability: see converter, IP44




DRAWING




1 - 20mm



150 mm, ET 90 mm



LIGHT DISTRIBUTION CURVE

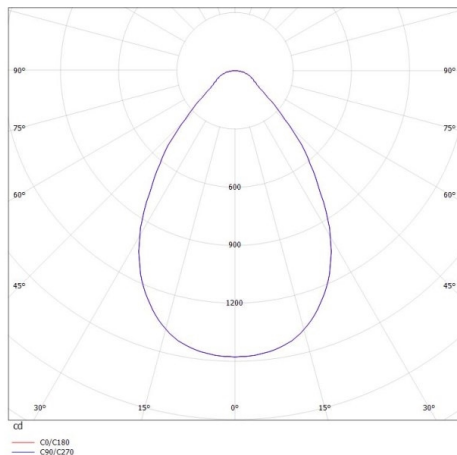

TECHNICAL DETAILS

Bulb type	LED 10W/15W/20W
Luminous flux [lm]	1220/1655/2180
Current sec. [mA]	350/500/700
Colour temp. [K]	4000K
CRI	>80
UGR	<19
Optics	microprismatic cover
Converter	without converter
Dimming	see converter
Light output	direct
Beam angle [°]	90°
Voltage [V]	30 VDC
Material	aluminium
Height [mm]	66
Diameter [mm]	169
Ceiling cutout [mm]	150
Ceiling thickness [mm]	1-20
Recess depth [mm]	90
IP protection class	IP44
Voltage class	protection cl. III
Shock resistance	IK06
Net weight [kg]	0,81
Colour lamp	white
RAL	9016
EAN-Number	9008905658419
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	D



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.