

ATUS DOUBLE SQUARE

472-20009560


ATUS DOUBLE SQUARE SD SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, white, similar to RAL 9003, beam 35°, light output direct, tilting 20°, with converter, dimmability: not dimmable, IP20



DRAWING



20°




82 x 165

TECHNICAL DETAILS

System perform. [W]	14
Bulb type	LED
Luminous flux [lm]	880
Colour temp. [K]	3000K
CRI	>90
Converter	with converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	35°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	165
Width [mm]	82
Height [mm]	110
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	15,50
Colour lamp	white
RAL	9003
EAN-Number	9010506149296
Lifetime [h]	L80 B10 20 000
Energy efficiency cl.	F

LIGHT DISTRIBUTION CURVE

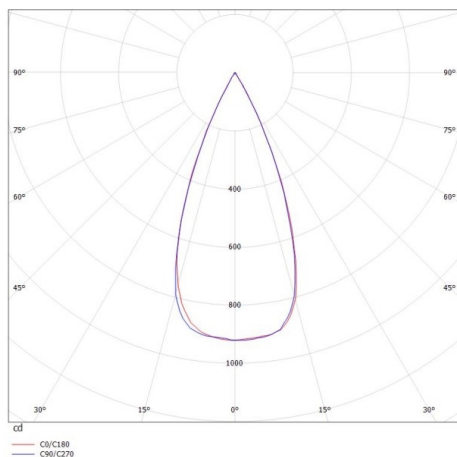

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.