

DARK NIGHT LENS


579-00204052405

DARK NIGHT LENS 3 R RECESSED SPOTLIGHT made of aluminium, white, similar to RAL 9016, decor gold,high-efficiently vacuum deposited aluminium reflector beam 22°, light output direct, UGR <16, without converter, max. 1050mA, dimmability: see converter, IP20




DRAWING

-  1 - 25 mm
-  112 x 40 mm, ET 85 mm

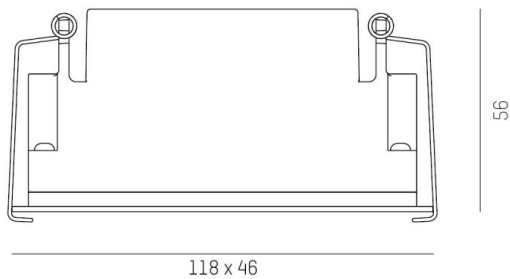

LIGHT DISTRIBUTION CURVE

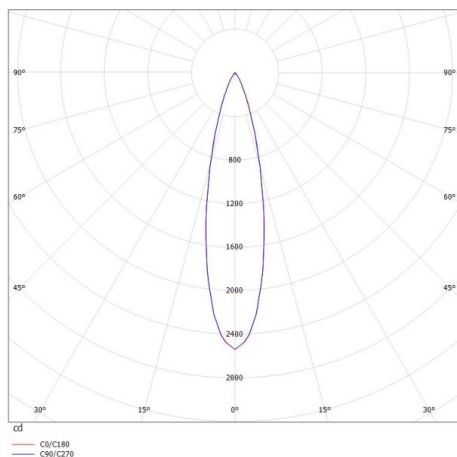

TECHNICAL DETAILS

| | |
|------------------------|--------------------------------------|
| Bulb type | LED 9W |
| Luminous flux [lm] | 780 |
| Current sec. [mA] | 1050 |
| Colour temp. [K] | 4000K |
| CRI | >90 |
| UGR | <16 |
| Optics | vacuum deposited aluminium reflector |
| Converter | without converter |
| Dimming | see converter |
| Light output | direct |
| Beam angle [°] | 22° |
| Material | aluminium |
| Length [mm] | 118 |
| Width [mm] | 46 |
| Height [mm] | 56 |
| Ceiling cutout [mm] | 112x40 |
| Ceiling thickness [mm] | 1-25 |
| Recess depth [mm] | 85 |
| IP protection class | IP20 |
| Voltage class | protection cl. II |
| Shock resistance | IK06 |
| Net weight [kg] | 0,33 |
| Colour lamp | white |
| RAL | 9016 |
| Colour decor | gold |
| EAN-Number | 9010506246841 |
| Lifetime [h] | L80 B10 50 000 |
| Energy efficiency cl. | F |



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.