

LOG OUT UP & DOWN

581-421108mpddd

LOG OUT UP/DOWN PDI SUSPENSION made of die-cast aluminium, natural anodised, microprismatic PMMA cover for perfect anti-glare light output direct / indirect, with converter, dimmability: DALI, cable transparent, adapter/ceiling base silver, pendant length 3000mm, IP20




DRAWING



TECHNICAL DETAILS

System perform. [W]	68
Bulb type	LED
Luminous flux [lm]	6160
Colour temp. [K]	4000K
CRI	>80
Optics	microprismatic cover
Designer	INHOUSE
Converter	with converter
Light output	direct / indirect
Voltage [V]	220-240V 50/60Hz
Material	die-cast aluminium
Length [mm]	1441
Width [mm]	60
Height [mm]	144
Pendant length [mm]	3000
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	8,85
Colour lamp	natural anodised
Colour adapter/ceiling base	grey
Electric wire	transparent
EAN-Number	9008905235467
Lifetime [h]	L80 B10 50 000

LIGHT DISTRIBUTION CURVE

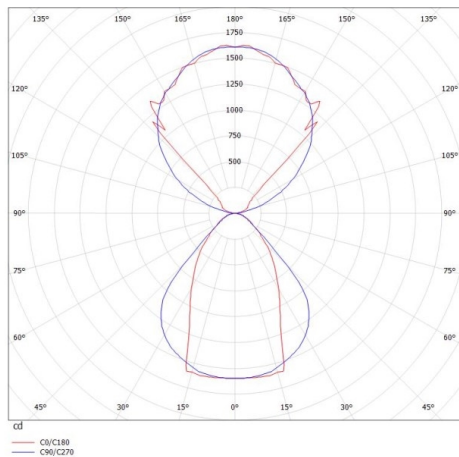

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.