


LOG OUT UP & DOWN

581-43196pm

LOG OUT UP/DOWN PDI SUSPENSION made of die-cast aluminium, black, similar to RAL 9005, satined PMMA opal diffuser light output direct / indirect, with converter, dimmability: not dimmable, cable transparent, adapter/ceiling base black, pendant length 3000mm, IP20




DRAWING

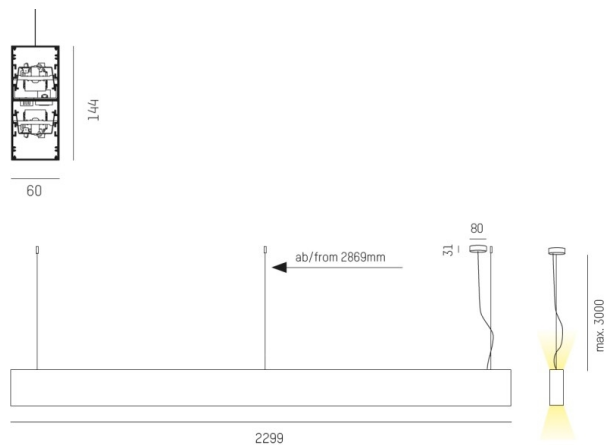

TECHNICAL DETAILS

System perform. [W]	108
Bulb type	LED
Luminous flux [lm]	9940
Colour temp. [K]	3000K
CRI	>80
Optics	PMMA opal diffuser
Designer	INHOUSE
Converter	with converter
Dimming	not dimmable
Light output	direct / indirect
Voltage [V]	220-240V 50/60Hz
Material	die-cast aluminium
Length [mm]	2299
Width [mm]	60
Height [mm]	144
Pendant length [mm]	3000
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	12,46
Colour lamp	black
RAL	9005
Colour adapter/ceiling base	black
Electric wire	transparent
EAN-Number	9008905216053
Lifetime [h]	L80 B10 50 000

LIGHT DISTRIBUTION CURVE

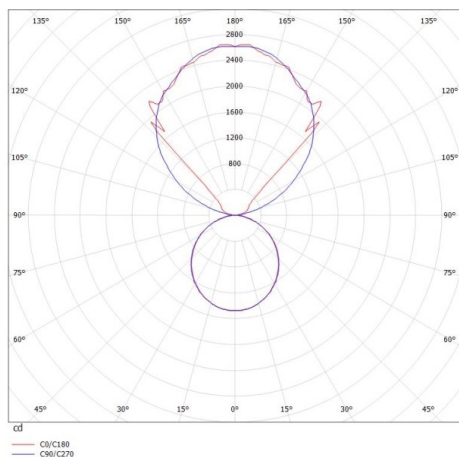

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.