


DASH 2

599-103010224040

DASH 2 VOLARE TRACK SPOTLIGHT WITH 2 PH VOLARE ADAPTER made of aluminium, grey, similar to RAL 9006, high-efficiently vacuum deposited aluminium reflector beam 17°, accessoire: glass, light output direct, UGR <19, swiveling 350°, tilting 90°, with converter, dimmability: not dimmable, adapter/ceiling base grey, IP20




DRAWING

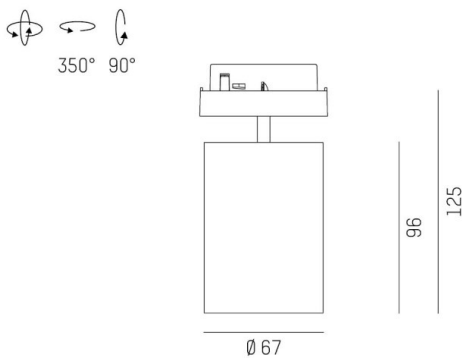

TECHNICAL DETAILS

System perform. [W]	10
Bulb type	LED
Luminous flux [lm]	580
Colour temp. [K]	4000K
CRI	>90
UGR	<19
Optics	vacuum deposited aluminium reflector
Designer	INHOUSE
Converter	with converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	17°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	72
Height [mm]	125
Diameter [mm]	67
IP protection class	IP20
Voltage class	protection cl. I
Shock resistance	IK01
Net weight [kg]	1,11
Colour lamp	grey
RAL	9006
Colour adapter/ceiling base	grey
EAN-Number	9010506800630
Lifetime [h]	L80 B10 20 000
Energy efficiency cl.	G
No. of luminaires B16A	200

LIGHT DISTRIBUTION CURVE

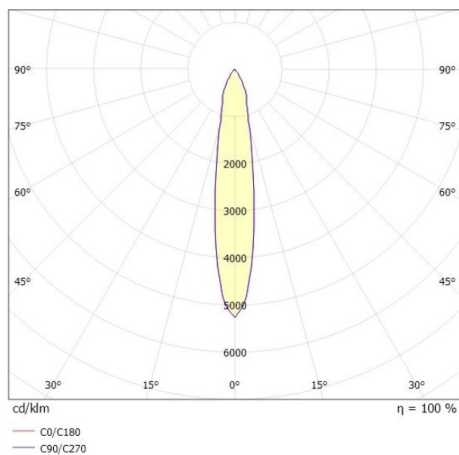

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.