


# SHOP STAR LEAN

608-00301152406pv2


SHOPSTAR LEAN TRACK TRACK SPOTLIGHT WITH 3 PH ADAPTER made of aluminium, black, similar to RAL 9005,high-efficiently vacuum deposited aluminium reflector without safety glass beam 20°, light output direct, swiveling 350, tilting 90, with converter, max. 700mA, dimmability: Pulse-DALI, adapter/ceiling base black, IP20



## DRAWING

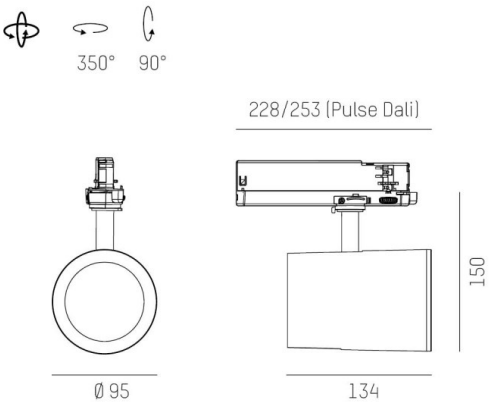

## LIGHT DISTRIBUTION CURVE

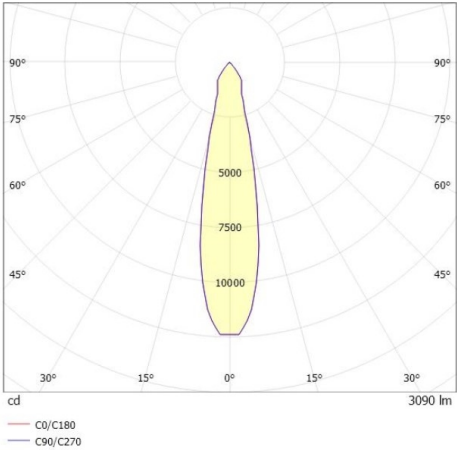

## TECHNICAL DETAILS

|                             |  |
|-----------------------------|--|
| System perform. [W]         | 27   |
| Bulb type                   | LED  |
| Luminous flux [lm]          | 3090   |
| Current sec. [mA]           | 700  |
| Colour temp. [K]            | 4000K  |
| CRI                         | >90  |
| Optics                      | aluminium reflector without protection glass |
| Designer                    | INHOUSE                                      |
| Converter                   | with converter                               |
| Light output                | direct                                       |
| Beam angle [°]              | 20°  |
| Voltage [V]                 | 220-240V 50/60Hz                             |
| Material                    | aluminium                                    |
| Length [mm]                 | 253  |
| Height [mm]                 | 150  |
| Diameter [mm]               | 95   |
| IP protection class         | IP20   |
| Voltage class               | protection cl. II                            |
| Net weight [kg]             | 0,99   |
| Colour lamp                 | black  |
| RAL                         | 9005   |
| Colour adapter/ceiling base | black  |
| EAN-Number                  | 9010870129320                                |
| Lifetime [h]                | L80 B10 50 000                               |
| Energy efficiency cl.       | D  |
| No. of luminaires B16A      | 50   |



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.