


SHOP STAR LEAN

608-003011824050v2

SHOPSTAR LEAN TRACK TRACK SPOTLIGHT WITH 3 PH ADAPTER made of aluminium, white, similar to RAL 9016,high-efficiently vacuum deposited aluminium reflector without safety glass beam 35°, light output direct, swiveling 350, tilting 90, with converter, max. 700mA, dimmability: not dimmable, adapter/ceiling base white, IP20




DRAWING

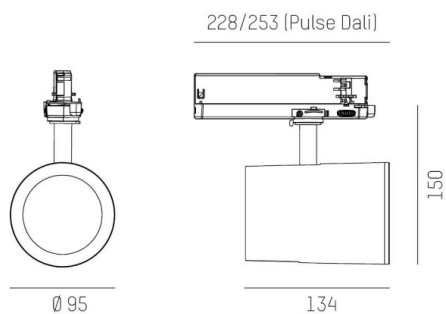

TECHNICAL DETAILS

| | |
|-----------------------------|--|
| System perform. [W] | 27 |
| Bulb type | LED |
| Luminous flux [lm] | 3090 |
| Current sec. [mA] | 700 |
| Colour temp. [K] | 4000K |
| CRI | >90 |
| Optics | aluminium reflector without protection glass |
| Designer | INHOUSE |
| Converter | with converter |
| Dimming | not dimmable |
| Light output | direct |
| Beam angle [°] | 35° |
| Voltage [V] | 220-240V 50/60Hz |
| Material | aluminium |
| Length [mm] | 228 |
| Height [mm] | 150 |
| Diameter [mm] | 95 |
| IP protection class | IP20 |
| Voltage class | protection cl. II |
| Net weight [kg] | 0,91 |
| Colour lamp | white |
| RAL | 9016 |
| Colour adapter/ceiling base | white |
| EAN-Number | 9010870129375 |
| Lifetime [h] | L80 B10 50 000 |
| Energy efficiency cl. | D |
| No. of luminaires B16A | 50 |

LIGHT DISTRIBUTION CURVE

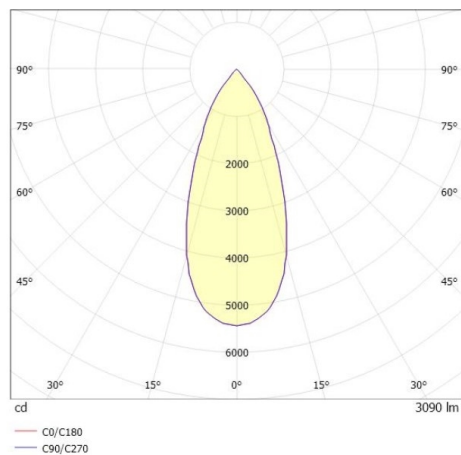

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.