



LENS

646-10702052905t

LENS QUAD F FLOOR LAMP made of die-cast aluminium, white, similar to RAL 9016, lens optic with anti-glare grid beam for quadruple workplace, light output direct / indirect, UGR <16, with converter, max. 525mA, dimmability: Push Dim, cable black, IP20 rocker button

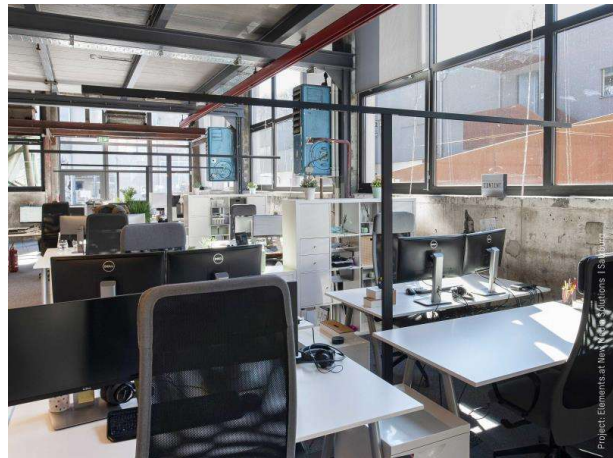


DRAWING

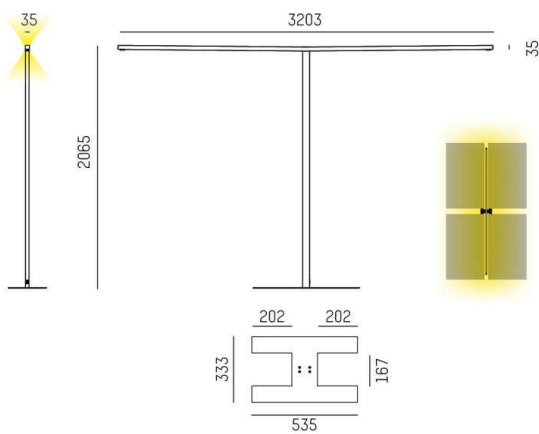

TECHNICAL DETAILS

| | |
|------------------------|---------------------------------------|
| System perform. [W] | 200 |
| Bulb type | LED |
| Luminous flux [lm] | 23380 |
| Current sec. [mA] | 525 |
| Colour temp. [K] | 3000K |
| CRI | >80 |
| UGR | <16 |
| Optics | lens optics with glare control louvre |
| Designer | INHOUSE |
| Converter | with converter |
| Light output | direct / indirect |
| Beam angle [°] | für Vierfacharbeitsplatz |
| Voltage [V] | 220-240V AC/DC |
| Material | die-cast aluminium |
| Length [mm] | 3203 |
| Width [mm] | 35 |
| Height [mm] | 2065 |
| IP protection class | IP20 |
| Voltage class | protection cl. I |
| Shock resistance | IK05 |
| Net weight [kg] | 18,45 |
| Colour lamp | white |
| RAL | 9016 |
| Electric wire | black |
| EAN-Number | 9010506803488 |
| Lifetime [h] | L80 B10 50 000 |
| Energy efficiency cl. | E |
| No. of luminaires B16A | 18 |

LIGHT DISTRIBUTION CURVE

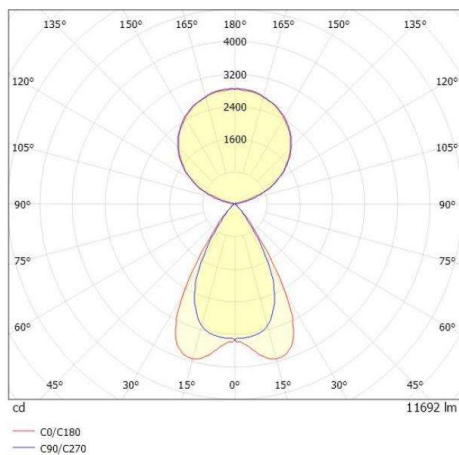

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.