


LENS

646-21502052908m

LENS SHORT QUAD F FLOOR LAMP made of die-cast aluminium, natural anodised, similar to RAL 9006, lens optic with anti-glare grid beam for quadruple workplace, light output direct / indirect, UGR <16, with converter, max. 525mA, dimmability: motion swarm, with motion detector, day light control and swarm function, cable black, IP20 out of the box mode - with activated daylight control and motion detection




DRAWING

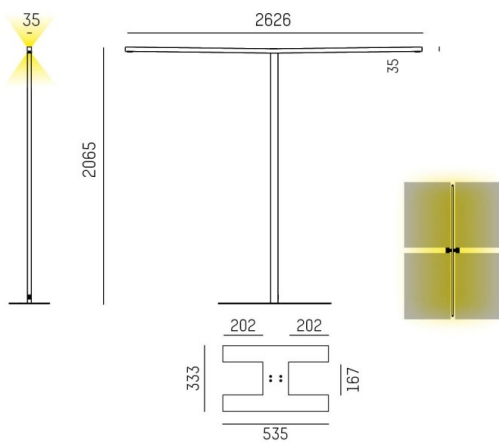

TECHNICAL DETAILS

System perform. [W]	179
Bulb type	LED
Luminous flux [lm]	21832
Current sec. [mA]	525
Colour temp. [K]	3000K
CRI	>80
UGR	<16
Optics	lens optics with glare control louvre
Designer	INHOUSE
Converter	with converter
Dimming	motion swarm
Motion detector	with motion detector, day light control and swarm function
Light output	direct / indirect
Beam angle [°]	für Vierfarbeitsplatz
Voltage [V]	220-240V AC/DC
Material	die-cast aluminium
Length [mm]	2626
Width [mm]	35
Height [mm]	2065
IP protection class	IP20
Voltage class	protection cl. I
Shock resistance	IK05
Net weight [kg]	14,06
Colour lamp	natural anodised
RAL	9006
Electric wire	black
EAN-Number	9010506848977
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	E
No. of luminaires B16A	18

LIGHT DISTRIBUTION CURVE

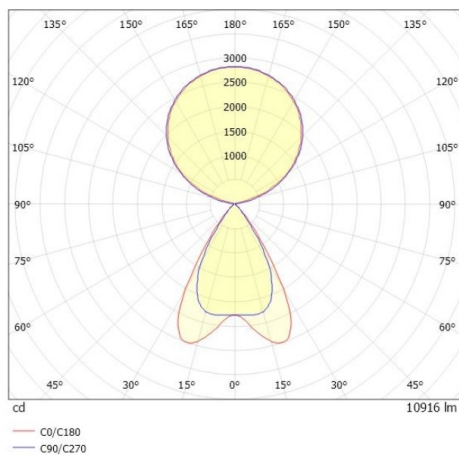

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.