


TRIGGA

662-01902022319r

TRIGGA LOON MINI VOLARE DIMM SUSPENSION WITH 2-PH VOLARE ADAPTER made of aluminium, black matt, similar to RAL 9005, anti-glare LFO lens due to microfaceted structure grey, beam 30°, light output direct, UGR <16, with converter, max. 350mA, dimmability: Loxone Air, cable black, fabric, adapter/ceiling base chrome, pendant length 1500mm, IP20




DRAWING

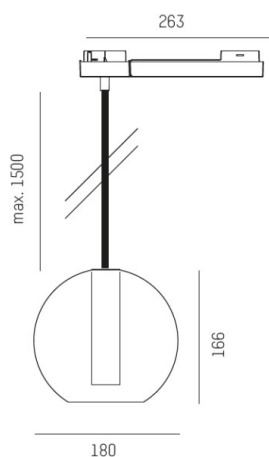

TECHNICAL DETAILS

System perform. [W]	6
Bulb type	LED
Luminous flux [lm]	230
Current sec. [mA]	350
Colour temp. [K]	2700K
CRI	>90
UGR	<16
Optics	LFO lens
Designer	Serge Cornelissen
Converter	with converter
Light output	direct
Beam angle [°]	30°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	180
Height [mm]	166
Pendant length [mm]	1500
Diameter [mm]	180
IP protection class	IP20
Voltage class	protection cl. II
Net weight [kg]	1,27
Colour lamp	black matt
RAL	9005
Colour of glass/shade	grey
Colour adapter/ceiling base	chrome
Electric wire	black, fabric
EAN-Number	9010506225471
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	G
No. of luminaires B16A	27

LIGHT DISTRIBUTION CURVE

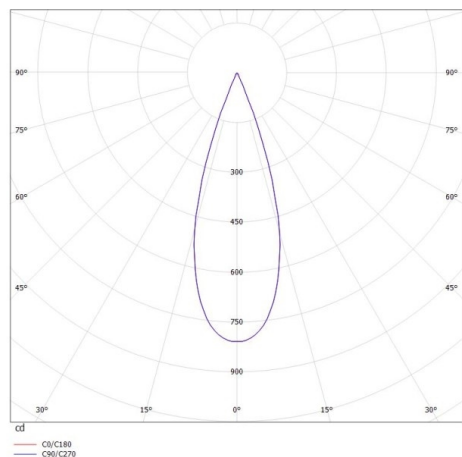

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.