

TRAIL TRACK

666-200103011305c

TRAIL TRACK TRACK SPOTLIGHT WITH 3 PH ADAPTER made of aluminium, white, similar to RAL 9016, linear optics beam 90°, light output direct, swiveling 350°, with converter, max. 1050mA, dimmability: Casambi, adapter/ceiling base white, IP20




DRAWING



TECHNICAL DETAILS

|                             |                            |
|-----------------------------|----------------------------|
| System perform. [W]         | 40                         |
| Bulb type                   | LED                        |
| Luminous flux [lm]          | 6060                       |
| Current sec. [mA]           | 1050                       |
| Colour temp. [K]            | 2700K                      |
| CRI                         | >80                        |
| Optics                      | high quality linear optics |
| Designer                    | INHOUSE                    |
| Converter                   | with converter             |
| Light output                | direct                     |
| Beam angle [°]              | 90°                        |
| Voltage [V]                 | 220-240V 50/60Hz           |
| Material                    | aluminium                  |
| Length [mm]                 | 858                        |
| Width [mm]                  | 64                         |
| Height [mm]                 | 42                         |
| IP protection class         | IP20                       |
| Voltage class               | protection cl. II          |
| Shock resistance            | IK06                       |
| Net weight [kg]             | 0,93                       |
| Colour lamp                 | white                      |
| RAL                         | 9016                       |
| Colour adapter/ceiling base | white                      |
| EAN-Number                  | 9010870827622              |
| Lifetime [h]                | L80 B10 50 000             |
| Energy efficiency cl.       | C                          |
| No. of luminaires B16A      | 50                         |

LIGHT DISTRIBUTION CURVE

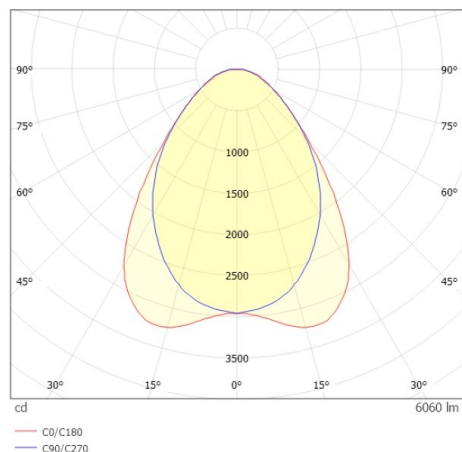

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.