

TRAIL TRACK

666-2001030214060

TRAIL TRACK TRACK SPOTLIGHT WITH 3 PH ADAPTER made of aluminium, black, similar to RAL 9005, linear optics beam asymmetric, light output direct, swiveling 350°, with converter, max. 1050mA, dimmability: not dimmable, adapter/ceiling base black, IP20




DRAWING



TECHNICAL DETAILS

| | |
|-----------------------------|----------------------------|
| System perform. [W] | 40 |
| Bulb type | LED |
| Luminous flux [lm] | 5560 |
| Current sec. [mA] | 1050 |
| Colour temp. [K] | 4000K |
| CRI | >80 |
| Optics | high quality linear optics |
| Designer | INHOUSE |
| Converter | with converter |
| Dimming | not dimmable |
| Light output | direct |
| Beam angle [°] | asymmetrisch |
| Voltage [V] | 220-240V 50/60Hz |
| Material | aluminium |
| Length [mm] | 858 |
| Width [mm] | 64 |
| Height [mm] | 42 |
| IP protection class | IP20 |
| Voltage class | protection cl. II |
| Shock resistance | IK06 |
| Net weight [kg] | 0,93 |
| Colour lamp | black |
| RAL | 9005 |
| Colour adapter/ceiling base | black |
| EAN-Number | 9010506844146 |
| Lifetime [h] | L80 B10 50 000 |
| Energy efficiency cl. | C |
| No. of luminaires B16A | 50 |

LIGHT DISTRIBUTION CURVE

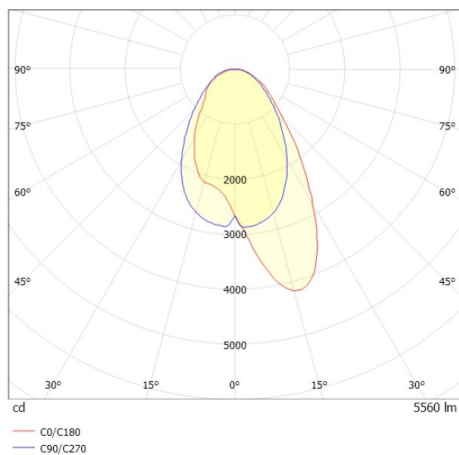

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.