

TRAIL TRACK

666-2001030314040

TRAIL TRACK TRACK SPOTLIGHT WITH 3 PH ADAPTER made of aluminium, grey, similar to RAL 9006, linear optics beam 60°, light output direct, UGR <22, swiveling 350°, with converter, max. 1050mA, dimmability: not dimmable, adapter/ceiling base grey, IP20




DRAWING



TECHNICAL DETAILS

System perform. [W]	40
Bulb type	LED
Luminous flux [lm]	6000
Current sec. [mA]	1050
Colour temp. [K]	4000K
CRI	>80
UGR	<22
Optics	high quality linear optics
Designer	INHOUSE
Converter	with converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	60°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	858
Width [mm]	64
Height [mm]	42
IP protection class	IP20
Voltage class	protection cl. II
Shock resistance	IK06
Net weight [kg]	0,93
Colour lamp	grey
RAL	9006
Colour adapter/ceiling base	grey
EAN-Number	9010506844443
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	C
No. of luminaires B16A	50

LIGHT DISTRIBUTION CURVE

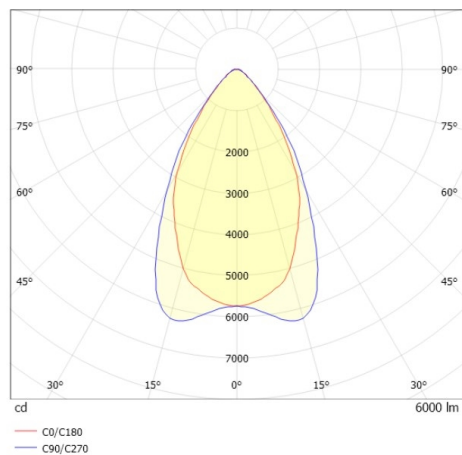

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.