


VIBO

668-00301052366

VIBO R RECESSED SPOTLIGHT made of aluminium, black matt, similar to RAL 9005, stray light-free hexagonal lens beam 23°, light output direct, UGR <16, swiveling 355°, tilting 30°, without converter, max. 500mA, dimmability: see converter, IP20




DRAWING

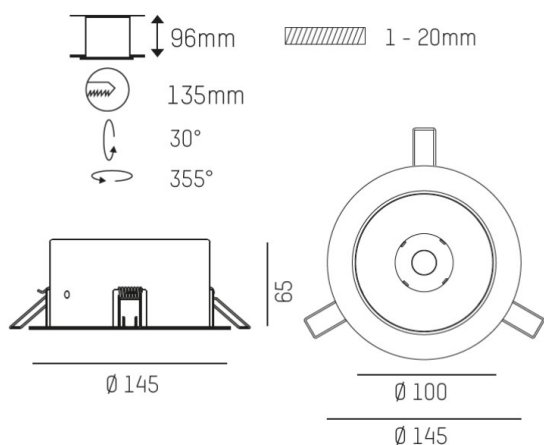

TECHNICAL DETAILS

Bulb type	LED 6W
Luminous flux [lm]	410
Current sec. [mA]	500
Colour temp. [K]	2700K
CRI	>90
UGR	<16
Optics	stray light-free hexagonal lens
Designer	INHOUSE
Converter	without converter
Dimming	see converter
Light output	direct
Beam angle [°]	23°
Material	aluminium
Height [mm]	65
Diameter [mm]	145
Ceiling cutout [mm]	135
Ceiling thickness [mm]	1-20
Recess depth [mm]	96
IP protection class	IP20
Voltage class	protection cl. II
Net weight [kg]	0,81

LIGHT DISTRIBUTION CURVE

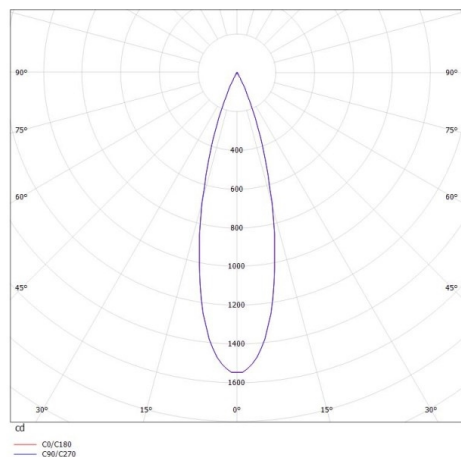

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.