


**RIDE RING SEGMENT 180°**

**675-30401102404d**

RIDE RING SYSTEM 180° SYSTEM LUMINAIRE made of die-cast aluminium, grey, similar to RAL 9006, satined PMMA diffuser for homogeneous illumination light output direct, with converter, max. 500mA, dimmability: DALI, IP20




**DRAWING**

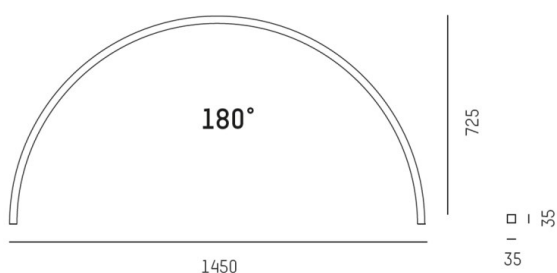

**TECHNICAL DETAILS**

|                        |                         |
|------------------------|-------------------------|
| System perform. [W]    | 38                      |
| Bulb type              | LED                     |
| Luminous flux [lm]     | 3720                    |
| Current sec. [mA]      | 500                     |
| Colour temp. [K]       | 4000K                   |
| CRI                    | >90                     |
| Optics                 | PMMA opal diffuser flat |
| Designer               | INHOUSE                 |
| Converter              | with converter          |
| Light output           | direct                  |
| Voltage [V]            | 220-240V 50/60Hz        |
| Material               | die-cast aluminium      |
| Width [mm]             | 35                      |
| Height [mm]            | 35                      |
| Diameter [mm]          | 1450                    |
| IP protection class    | IP20                    |
| Voltage class          | protection cl. I        |
| Net weight [kg]        | 7,58                    |
| Colour lamp            | grey                    |
| RAL                    | 9006                    |
| EAN-Number             | 9010506271997           |
| Lifetime [h]           | L80 B10 50 000          |
| No. of luminaires B16A | 25                      |

**LIGHT DISTRIBUTION CURVE**

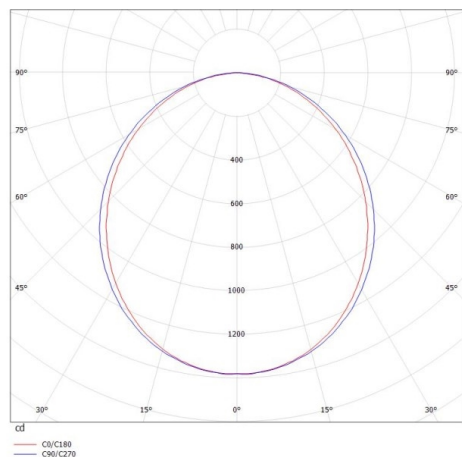

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.