


MAGNETICS H

708-00912002906d

MAGNETICS H W SURFACE MOUNTED WALL LUMINAIRE made of die-cast aluminium, black, similar to RAL 9005, satined PMMA opal diffuser beam 100°, light output indirect, with converter, max. 700mA, dimmability: DALI 2, adapter/ceiling base black, IP20 directly without light inserts, indirectly illuminated




DRAWING



TECHNICAL DETAILS

System perform. [W]	18W/ MAX 100
Bulb type	LED
Luminous flux [lm]	1219
Current sec. [mA]	700
Colour temp. [K]	3000K
CRI	>90
Optics	PMMA opal diffuser
Designer	INHOUSE
Converter	with converter
Light output	indirect
Beam angle [°]	100°
Voltage [V]	220-240V 50/60Hz
Material	die-cast aluminium
Length [mm]	1403
Width [mm]	47,5
Height [mm]	35
IP protection class	IP20
Voltage class	protection cl. I
Shock resistance	IK03
Net weight [kg]	2,09
Colour lamp	black
RAL	9005
Colour adapter/ceiling base	black
EAN-Number	9010506736731
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	F
No. of luminaires B16A	11

LIGHT DISTRIBUTION CURVE

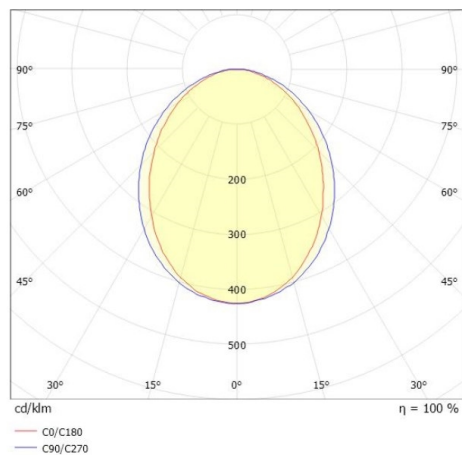

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.