


MAGNETICS

708-01502002906d


MAGNETICS SPHERE M PD TRACK SPOTLIGHT WITH 24V ADAPTER made of hand-blown glass, black, similar to RAL 9005, satined glass satined, beam 330°, light output direct, UGR <16, without converter, max. 195mA, dimmability: DALI, cable black, adapter/ceiling base black, pendant length 1500mm, IP20



DRAWING

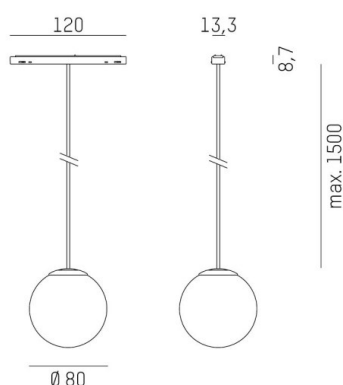

LIGHT DISTRIBUTION CURVE

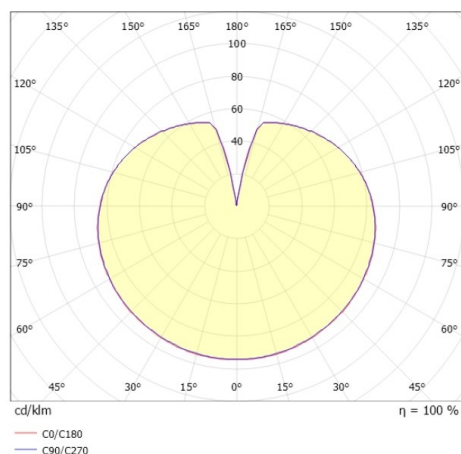

TECHNICAL DETAILS

| | |
|-----------------------------|--------------------|
| System perform. [W] | 4 |
| Bulb type | LED |
| Luminous flux [lm] | 290 |
| Current sec. [mA] | 195 |
| Colour temp. [K] | 3000K |
| CRI | >90 |
| UGR | <16 |
| Optics | satined glass |
| Designer | INHOUSE |
| Converter | without converter |
| Light output | direct |
| Beam angle [°] | 330° |
| Voltage [V] | 24 VDC |
| Material | hand-blown glass |
| Length [mm] | 120 |
| Width [mm] | 13,7 |
| Pendant length [mm] | 1500 |
| Diameter [mm] | 80 |
| IP protection class | IP20 |
| Voltage class | protection cl. III |
| Shock resistance | IK00 |
| Net weight [kg] | 0,46 |
| Colour lamp | black |
| RAL | 9005 |
| Colour of glass/shade | satined |
| Colour adapter/ceiling base | black |
| Electric wire | black |
| EAN-Number | 9010870398429 |
| Lifetime [h] | L80 B10 50 000 |
| Energy efficiency cl. | E |



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.