


MAGNETICS

708-102030647060

MAGNETICS SPOT L TRACK SPOTLIGHT WITH 24V ADAPTER made of aluminium, black, similar to RAL 9005, High-Precision-Anti-Glare-Lens beam 45°, light output direct, UGR <19, swiveling 350°, tilting 90°, without converter, max. 600mA, dimmability: not dimmable, adapter/ceiling base black, IP20




DRAWING

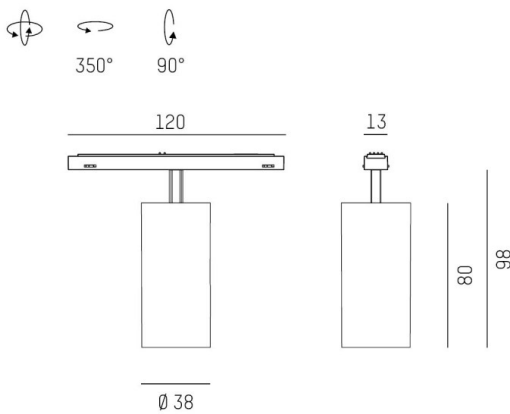

TECHNICAL DETAILS

System perform. [W]	12
Bulb type	LED
Luminous flux [lm]	1100
Current sec. [mA]	600
Colour temp. [K]	3500K
CRI	PREMIUM>90
UGR	<19
Optics	high-Precision-Anti-Glare-Lens
Designer	INHOUSE
Converter	without converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	45°
Voltage [V]	24 VDC
Material	aluminium
Length [mm]	120
Width [mm]	13
Height [mm]	98
Diameter [mm]	38
IP protection class	IP20
Voltage class	protection cl. III
Shock resistance	IK03
Net weight [kg]	0,35
Colour lamp	black
RAL	9005
Colour adapter/ceiling base	black
EAN-Number	9010870454866
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	D

LIGHT DISTRIBUTION CURVE

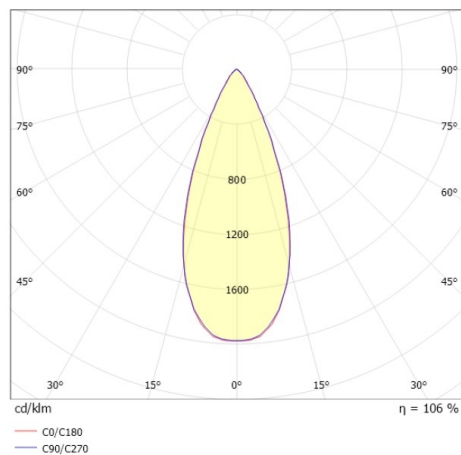

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.