


## LOG 50 SYSTEM


715-011710101950d



## DRAWING

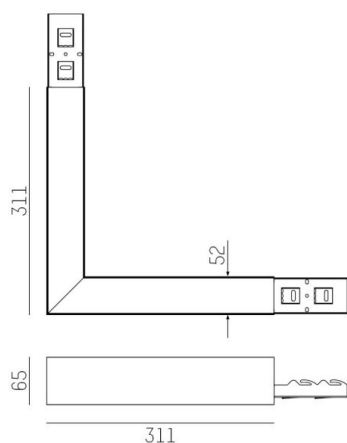

## LIGHT DISTRIBUTION CURVE

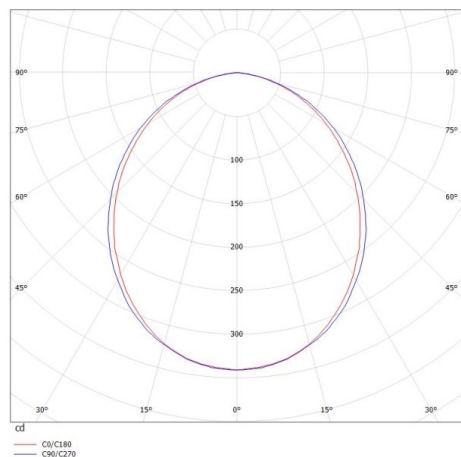

## TECHNICAL DETAILS

System perform. [W]	7
Luminous flux [lm]	860
Current sec. [mA]	340
Colour temp. [K]	3000K
CRI	>80
Optics	PMMA opal diffuser
Designer	INHOUSE
Converter	with converter
Light output	direct
Voltage [V]	220-240V 50/60Hz
Through wiring	3x1,5mm <sup>2</sup> + 2x0,75mm <sup>2</sup>
Material	die-cast aluminium

Length [mm]	311
Width [mm]	52
Height [mm]	65
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	1,71

Colour lamp	white
RAL	9016
EAN-Number	9010506404463
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	C
No. of luminaires B16A	50



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.