



LOG 50 SYSTEM

715-1704110414000

LOG 50 OFFICE EINSATZ LIGHT INSERT made of metal, Lens optics with vacuum deposited synthetic reflector beam 66°, light output direct, UGR <16, with converter, max. 350mA, dimmability: not dimmable, through wiring 3x1,5mm², IP20

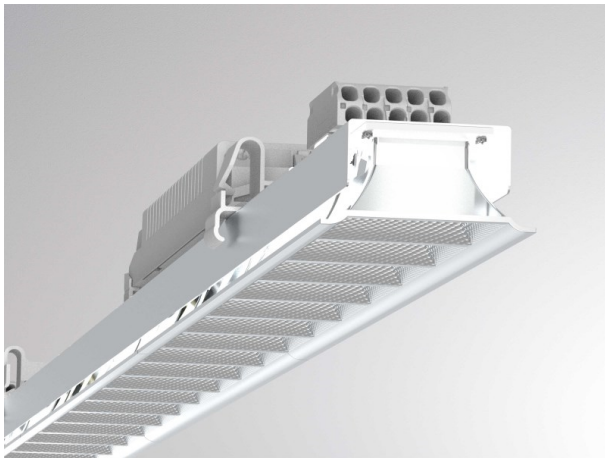


DRAWING

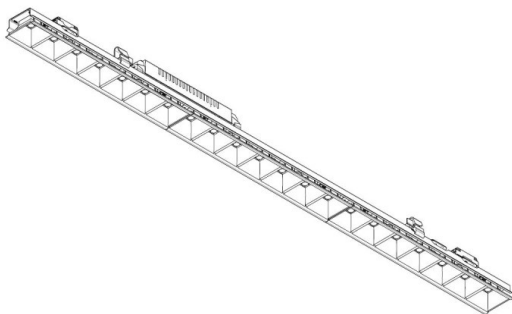

TECHNICAL DETAILS

System perform. [W]	16
Bulb type	LED
Luminous flux [lm]	2280
Current sec. [mA]	350
Colour temp. [K]	4000K
CRI	>80
UGR	<16
Optics	Lens optics with vacuum deposited synthetic reflector
Designer	INHOUSE
Converter	with converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	66°
Voltage [V]	220-240V 50/60Hz
Through wiring	3x1,5mm²
Material	metal
Length [mm]	841,5
Width [mm]	49
Height [mm]	50
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	1,13
EAN-Number	9010870550308
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	D
No. of luminaires B16A	50

LIGHT DISTRIBUTION CURVE

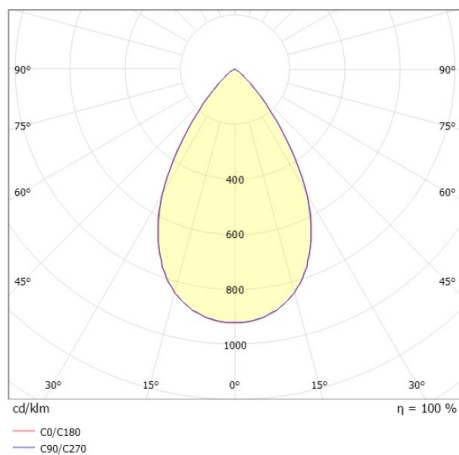

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.