



LOG 50 SYSTEM

715-1706110114050

LOG 50 WALLWASHER EINSATZ LIGHT INSERT made of metal, decor white, Lens optics with vacuum deposited synthetic reflector beam asymmetric, light output direct, with converter, max. 700mA, dimmability: not dimmable, through wiring 3x1,5mm², IP20

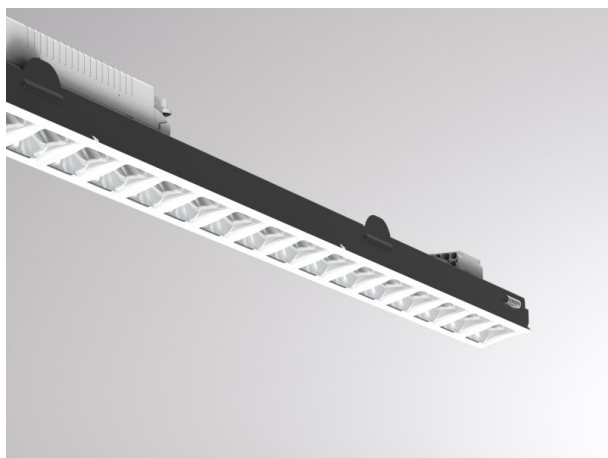


DRAWING

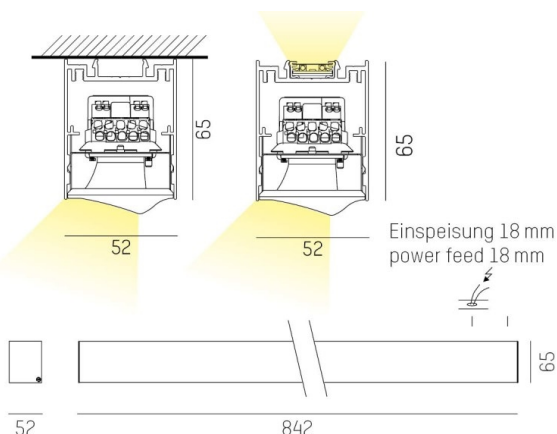

TECHNICAL DETAILS

|                        |   |
|------------------------|---|
| System perform. [W]    | 20  |
| Bulb type              | LED   |
| Luminous flux [lm]     | 2150  |
| Current sec. [mA]      | 700   |
| Colour temp. [K]       | 4000K   |
| CRI                    | >80   |
| Optics                 | Lens optics with vacuum deposited synthetic reflector |
| Designer               | INHOUSE   |
| Converter              | with converter  |
| Dimming                | not dimmable  |
| Light output           | direct  |
| Beam angle [°]         | asymmetrisch  |
| Voltage [V]            | 220-240V 50/60Hz                                      |
| Through wiring         | 3x1,5mm²  |
| Material               | metal   |
| Height [mm]            | 55  |
| IP protection class    | IP20  |
| Voltage class          | protection cl. I                                      |
| Net weight [kg]        | 1,06  |
| Colour decor           | white   |
| EAN-Number             | 9010870551596   |
| Lifetime [h]           | L80 B10 50 000  |
| Energy efficiency cl.  | C   |
| No. of luminaires B16A | 50  |

LIGHT DISTRIBUTION CURVE

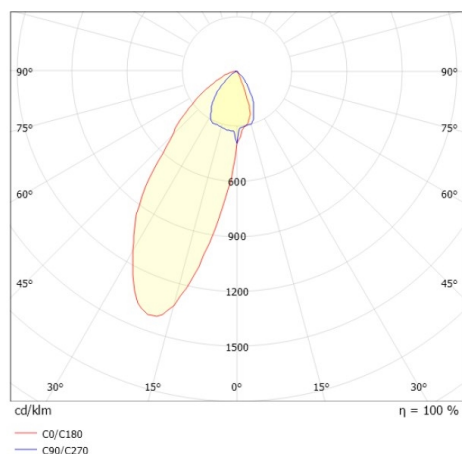

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.