


VALO

720-001331024550

VALO SYSTEM SYSTEM LUMINAIRE made of aluminium, white, similar to RAL 9016, PMMA cover light output direct / indirect, with converter, max. 700mA, dimmability: not dimmable, adapter/ceiling base white, IP20

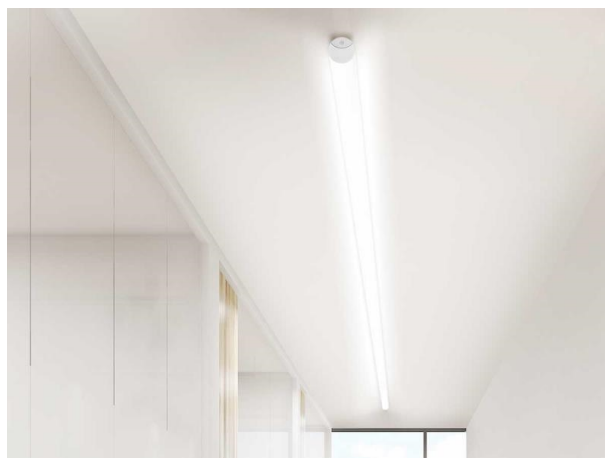


DRAWING



TECHNICAL DETAILS

System perform. [W]	36
Bulb type	LED
Luminous flux [lm]	3870
Current sec. [mA]	700
Colour temp. [K]	4000K
CRI	>90
Optics	PMMA diffuser
Designer	INHOUSE
Converter	with converter
Dimming	not dimmable
Light output	direct / indirect
Voltage [V]	48 VDC
Material	aluminium
Length [mm]	1706
Diameter [mm]	70
IP protection class	IP20
Voltage class	protection cl. II
Shock resistance	IK02
Net weight [kg]	3,93
Colour lamp	white
RAL	9016
Colour adapter/ceiling base	white
EAN-Number	9010506246292
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	E

LIGHT DISTRIBUTION CURVE

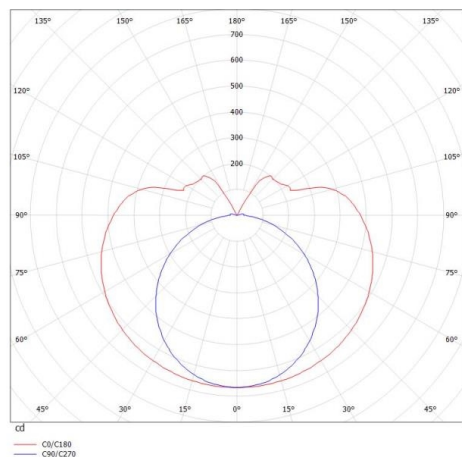

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.