



VALO

720-00332102755b

VALO SDI WALL / CEILING LUMINAIRE made of aluminium, white, similar to RAL 9016, PMMA cover light output direct / indirect, with converter, max. 700mA, dimmability: Smart bluetooth, adapter/ceiling base white, IP20

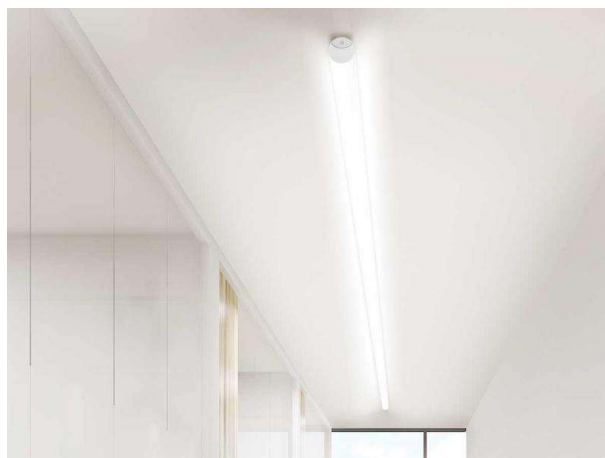


DRAWING

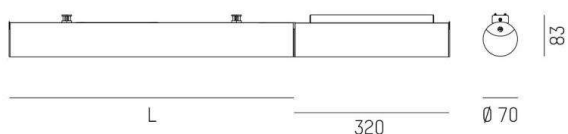

|         |           |
|---------|-----------|
| SYS 15W | L: 586mm  |
| SYS 30W | L: 1146mm |
| SYS 45W | L: 1706mm |
| SYS 60W | L: 2266mm |
| SYS 90W | L: 3386mm |

LIGHT DISTRIBUTION CURVE

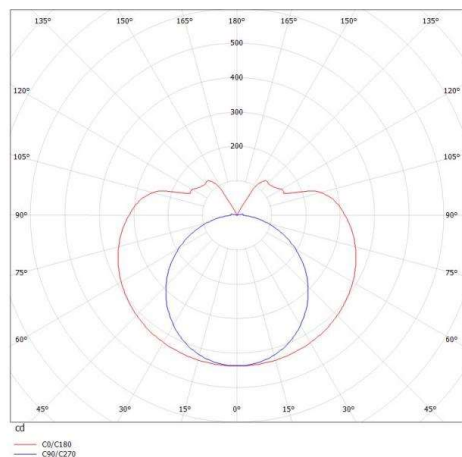

TECHNICAL DETAILS

|                             |                   |
|-----------------------------|-------------------|
| System perform. [W]         | 30                |
| Bulb type                   | LED               |
| Luminous flux [lm]          | 2540              |
| Current sec. [mA]           | 700               |
| Colour temp. [K]            | 3500K             |
| CRI                         | >90               |
| Optics                      | PMMA diffuser     |
| Designer                    | INHOUSE           |
| Converter                   | with converter    |
| Light output                | direct / indirect |
| Voltage [V]                 | 220-240V 50/60Hz  |
| Material                    | aluminium         |
| Length [mm]                 | 1466              |
| Height [mm]                 | 83                |
| Diameter [mm]               | 70                |
| IP protection class         | IP20              |
| Voltage class               | protection cl. II |
| Shock resistance            | IK02              |
| Net weight [kg]             | 4,64              |
| Colour lamp                 | white             |
| RAL                         | 9016              |
| Colour adapter/ceiling base | white             |
| EAN-Number                  | 9010506270983     |
| Lifetime [h]                | L80 B10 50 000    |
| Energy efficiency cl.       | E                 |
| No. of luminaires B16A      | 15                |



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.