

VALO


720-003331024550

VALO SDI WALL / CEILING LUMINAIRE made of aluminium, white, similar to RAL 9016, PMMA cover light output direct / indirect, with converter, max. 700mA, dimmability: not dimmable, adapter/ceiling base white, IP20



DRAWING


TECHNICAL DETAILS

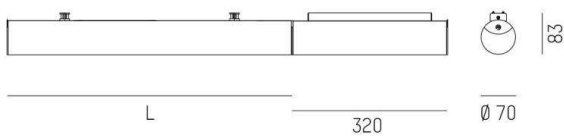

System perform. [W]	45
Bulb type	LED
Luminous flux [lm]	3870
Current sec. [mA]	700
Colour temp. [K]	4000K
CRI	>90
Optics	PMMA diffuser
Designer	INHOUSE
Converter	with converter
Dimming	not dimmable
Light output	direct / indirect
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	2026
Height [mm]	83
Diameter [mm]	70
IP protection class	IP20
Voltage class	protection cl. II
Shock resistance	IK02
Net weight [kg]	5,61
Colour lamp	white
RAL	9016
Colour adapter/ceiling base	white
EAN-Number	9010506271010
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	E
No. of luminaires B16A	15

SYS 15W	L: 586mm
SYS 30W	L: 1146mm
SYS 45W	L: 1706mm
SYS 60W	L: 2266mm
SYS 90W	L: 3386mm

LIGHT DISTRIBUTION CURVE

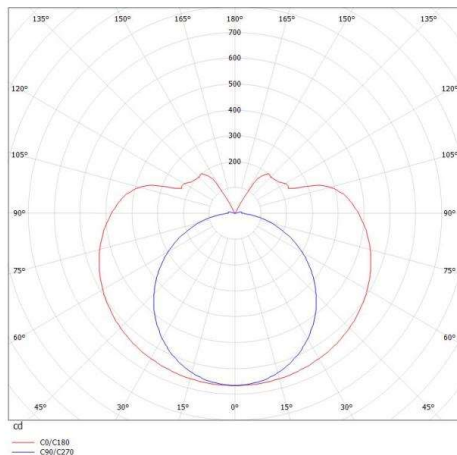

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.