


IBP

757-16008dali

IBP RECESSED CEILING LUMINAIRE made of steel sheet, white, microprismatic PMMA cover for perfect anti-glare light output direct, with converter, dimmability: DALI, IP54




DRAWING

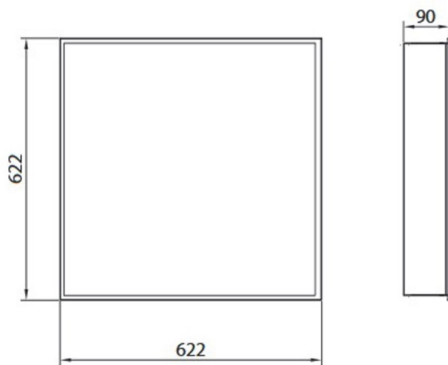

TECHNICAL DETAILS

System perform. [W]	32
Bulb type	LED
Luminous flux [lm]	4200
Colour temp. [K]	3000K
CRI	>80
Optics	microprismatic cover
Converter	with converter
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	steel sheet
Length [mm]	622
Width [mm]	622
Height [mm]	90
Recess depth [mm]	200
IP protection class	IP54
Voltage class	protection cl. I
Net weight [kg]	2,60
Colour lamp	white
EAN-Number	8596099018719
Lifetime [h]	50 000
Energy efficiency cl.	D

LIGHT DISTRIBUTION CURVE

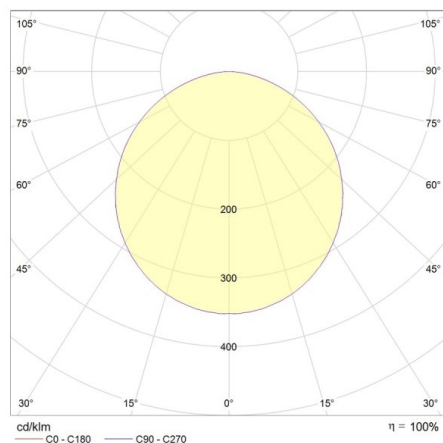

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.