



MOVIT

851-s3070n01

MOVIT SQUARE FLOODLIGHTS made of aluminium, white, transparent glass transparent, beam asymmetric, light output direct, tilting 180°, with converter, dimmability: DALI 2, Push, cable black, IP66

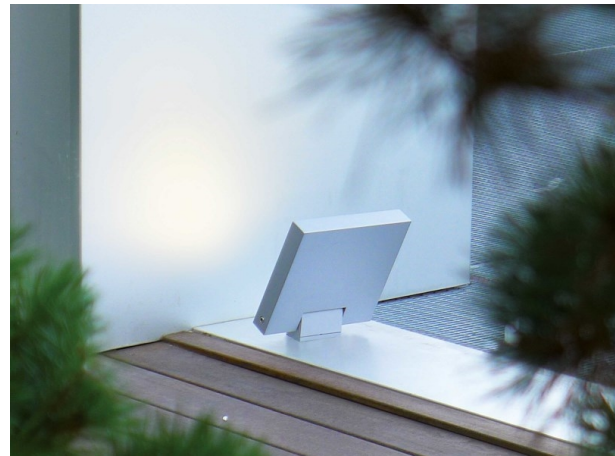


DRAWING

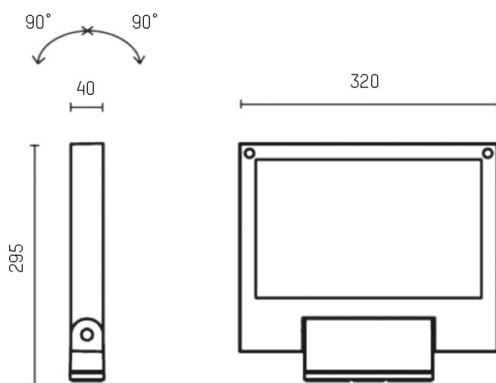

TECHNICAL DETAILS

System perform. [W]	42
Bulb type	LED
Luminous flux [lm]	2935
Colour temp. [K]	4000K
CRI	>80
Optics	transparent glass
Converter	with converter
Light output	direct
Beam angle [°]	asymmetrisch
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	295
Width [mm]	320
Height [mm]	40
IP protection class	IP66
Voltage class	protection cl. I
Shock resistance	IK10
Net weight [kg]	4,41
Colour lamp	white
Colour of glass/shade	transparent
Electric wire	black
EAN-Number	8033357729500
Lifetime [h]	70 000 L80 B10
Energy efficiency cl.	E

LIGHT DISTRIBUTION CURVE

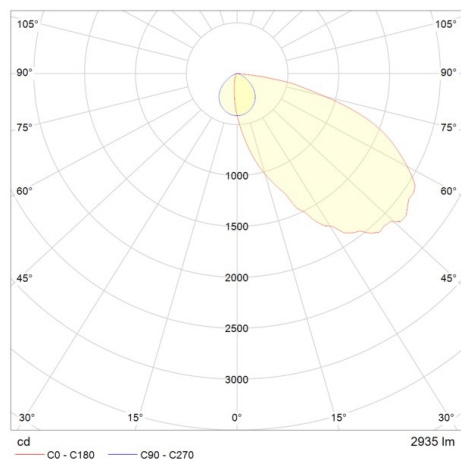

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.